



Project / Type

Notes

Count / Date

**General**Ceiling / Wall , Semi-Recessed¹-Surface²black , RAL 9005³front IP40¹-IP20² , back IP20

2590 lm

2130 lm/m

jet black

LED

4000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.72

MDER 0.66

Optical

High Performance Opal

opal (lambertsch)

PstLM ≤ 1.0^{1 2 4}SVM ≤ 0.4^{1 2 4}**Electrical**

DALI-2

220-240 V

system 19.1 W

system 136 lm/W⁵

PC1

1 DALI Addr.

16 W/m

Physical

length 1221 mm

width 89 mm

height 28 mm

2.7 kg

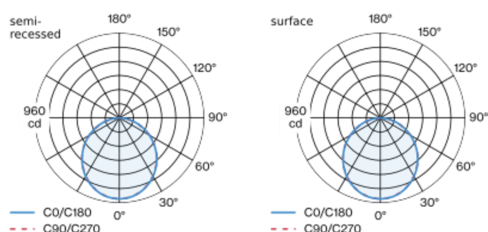
Cutout

length 1234 mm

width 70 mm

min. ceiling thickness 12.5 mm

recessed depth 13 mm

¹ semi-recessed ² surface ³ RAL code⁴ Value of containing product at full load (undimmed)⁵ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.**Installation instructions****Light distribution****Product drawing**