




Project / Type

Notes

Count / Date

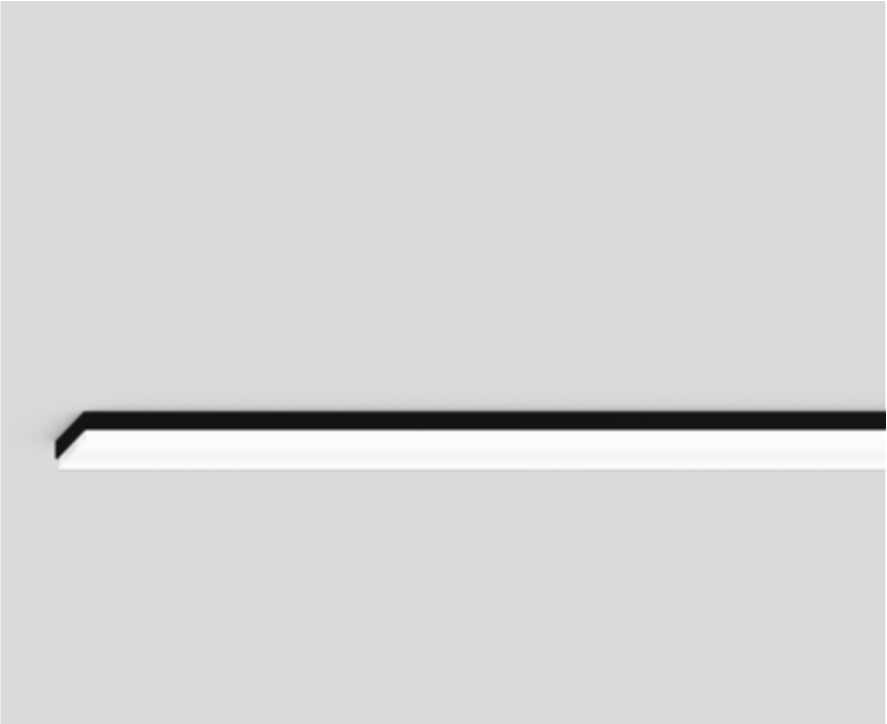

General
Ceiling / Wall , Semi-Recessed
black , RAL 9005 ¹
front IP40 , back IP20
3520 lm
1930 lm/m

LED
3000 K
CRI ≥ 80
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
MR 0.54
MDER 0.49

Optical
Jut-Out
opal (lambertsch)
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²


Electrical
DALI-2
220-240 V
system 28.6 W
system 123 lm/W ³
PC1
1 DALI Addr.
16 W/m

Physical
length 1835 mm
width 89 mm
height 38 mm
5.4 kg

Cutout
length 1843 mm
width 70 mm
min. ceiling thickness 12.5 mm
recessed depth 13 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses
& operating device efficiency

Light distribution



Product drawing



Installation instructions

