

MOVE IT 45 track indirect


050-743953G



Project / Type

Notes

Count / Date

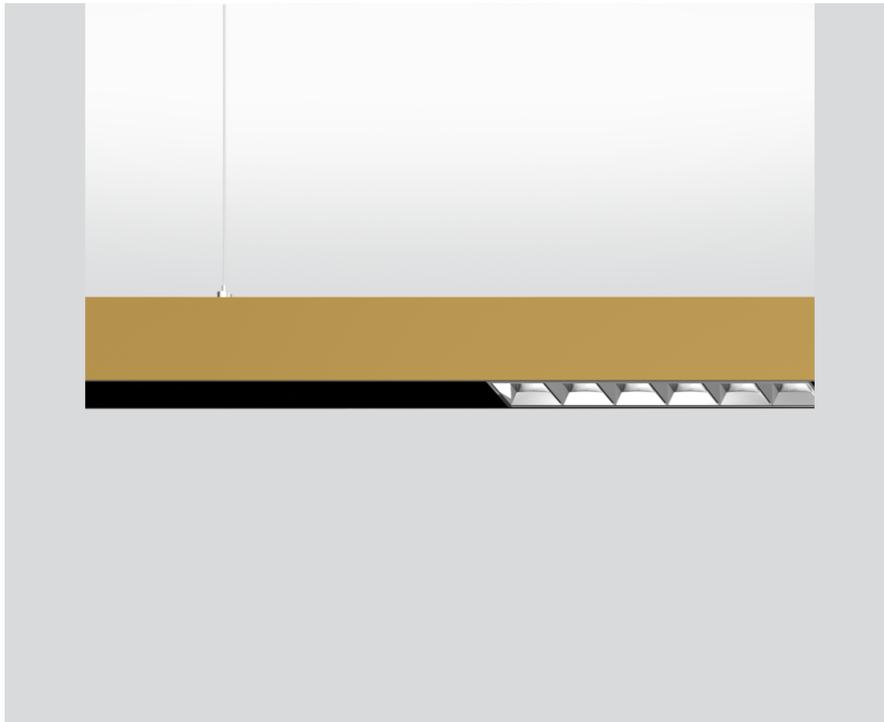

General

Ceiling , Suspended
gold , gold dust/RAL9005 ¹
Inner colour black
1670 lm/m
IP20
6000 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89
MR 0.61
MDER 0.55

Electrical


DALI-2 single control
51 W
PC3 48V
118 lm/W
1 DALI Addr.
14 W/m

Physical


length 3625 mm
width 48 mm
height 60 mm
5.1 kg

Extruded aluminium profile with 45mm width groove; for suspended mounting (1500 mm cable suspension as an accessory); height adjustment without tools; with indirect light component for additional accentuation of the ceiling; indirect light component covered with opal lens cover; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with integrated power track profile for take off of supply voltage and DALI signal; surface gold; powder coated / anodised; light insets can be installed and moved without tools by means of magnetic holders+locking; degree of protection IP20; PC3 48V; accessories are listed separately; light source not replaceable;

Light distribution



Product drawing



¹ RAL code

Installation instructions



Lighting calculator

