



Project / Type

Notes

Count / Date

**General**Ceiling / Wall , Semi-Recessed¹-Surface²white , RAL 9010³front IP40¹-IP20² , back IP20

4900 lm

2010 lm/m

traffic white

LED

3000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.54

MDER 0.49

Optical

High Performance Opal

opal (lambertsch)

PstLM ≤ 1.0^{1 2 4}SVM ≤ 0.4^{1 2 4}**Electrical**

DALI-2

220-240 V

system 38 W

system 129 lm/W⁵

PC1

1 DALI Addr.

16 W/m

Physical

length 2438 mm

width 89 mm

height 28 mm

5.5 kg

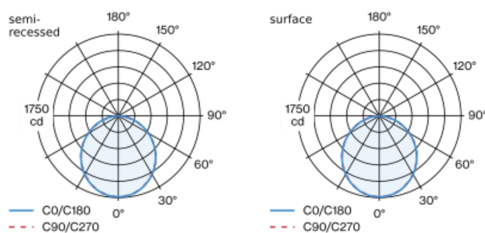
Cutout

length 2451 mm

width 70 mm

min. ceiling thickness 12.5 mm

recessed depth 13 mm

¹ semi-recessed ² surface ³ RAL code⁴ Value of containing product at full load (undimmed)⁵ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.**Light distribution****Product drawing**