

MOVE IT 45 track indirect


050-743951G



Project / Type

Notes

Count / Date

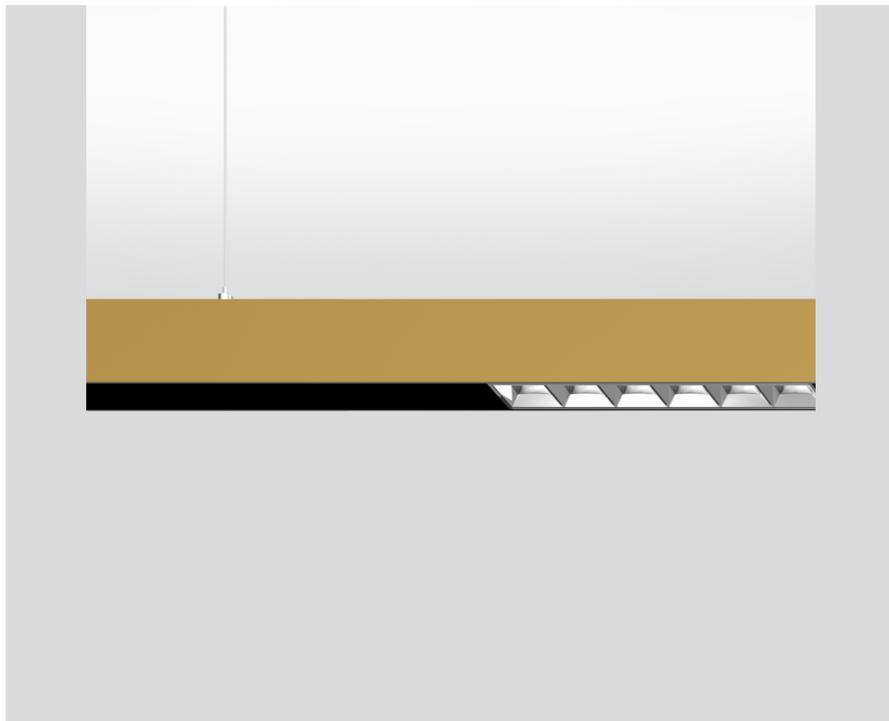

General

Ceiling , Suspended
gold , gold dust/RAL9005 ¹
Inner colour black
1670 lm/m
IP20
6000 lm

LED

3000 K
CRI \geq 90
L80 / 50000 h
initial MacAdam \leq 3 SDCM
R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89
MR 0.61
MDER 0.55

Optical

P_{stLM} \leq 1.0 ²
SVM \leq 0.4 ²

Electrical


non DIM
system 51 W
PC3 48V
system 118 lm/W³
14 W/m

Physical


length 3625 mm
width 48 mm
height 60 mm
5.1 kg

Extruded aluminium profile with 45mm width groove; for suspended mounting (1500 mm cable suspension as an accessory); height adjustment without tools; with indirect light component for additional accentuation of the ceiling; indirect light component covered with opal lens cover; light colour 3000 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with integrated power rail profile for supply voltage feed; surface gold; powder coated / anodised; light insets can be installed and moved without tools by means of magnetic holders+locking; degree of protection IP20; PC3 48V; accessories are listed separately; light source not replaceable;

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions



Lighting calculator

