

# LENO jut-out

semi-recessed / surface system


051-8216637J 051-8920187



Project / Type

Notes

Count / Date

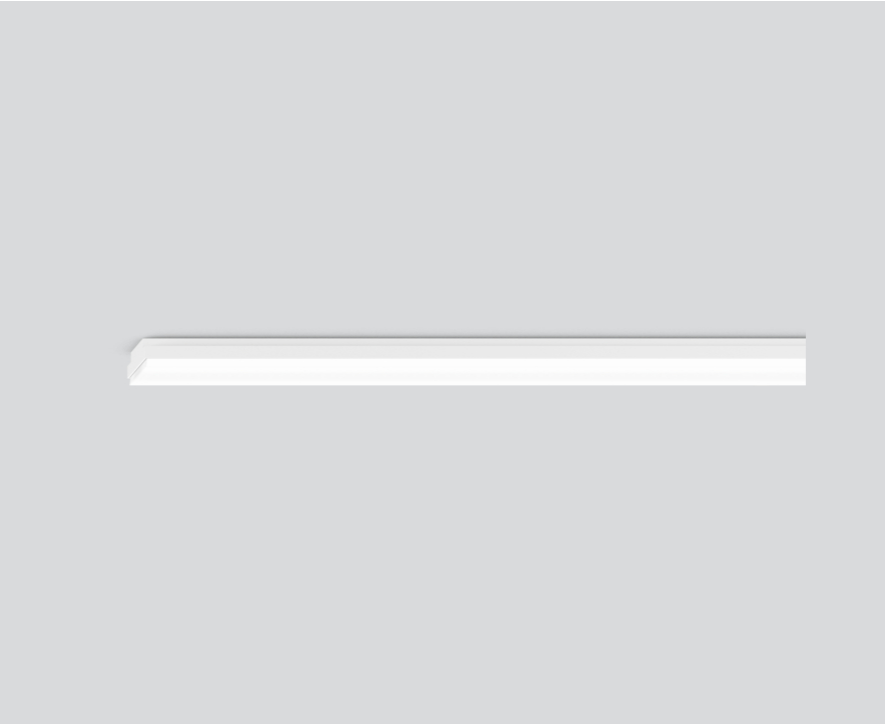

RG0  
IEC 62471

220-240V

### General

Ceiling / Wall , Semi-Recessed<sup>1</sup>-Surface<sup>2</sup>

white , RAL9010 <sup>3</sup>

2040 lm/m

front IP40<sup>1</sup>-IP20<sup>2</sup> , back IP20

3730 lm

traffic white

### LED

4000 K

CRI ≥ 80

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

MR 0.72

MDER 0.66

### Optical

Jut-Out

opal (lambertsch)

PstLM ≤ 1.0 <sup>4</sup>

SVM ≤ 0.4 <sup>4</sup>

### Electrical

DALI-2

system 28.6 W

PC1 220-240V

system 130 lm/W<sup>5</sup>

1 DALI Addr.

16 W/m

### Physical

length 1830 mm

width 89 mm

height 38 mm

4.3 kg

### Cutout

length 1843 mm


width 70 mm

min. ceiling thickness 12.5 mm


recessed depth 13 mm

Low profile recessed mounted luminaire, 15 mm visible height or low profile surface mounted luminaire, 28 mm total height; converter integrated into luminaire housing; suitable for wall or ceiling mounting; suitable for installation in primed or exposed concrete, in plasterboard constructions and in plastered walls or ceilings; for continuous lighting systems; surface white powder coated; fall-safe light inset made of extruded aluminium profile, can be inserted in the canal without tools by magnetic holders; side coupled light directed downward through LGP (LIGHT GUIDING PRISM) body and high efficiency reflector; HPO (High Performance Opal) cover for uniform illumination; jut-out cover; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection from below IP40 (from above IP20); PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source not replaceable; control gear replaceable by an authorized professional;

### Light distribution

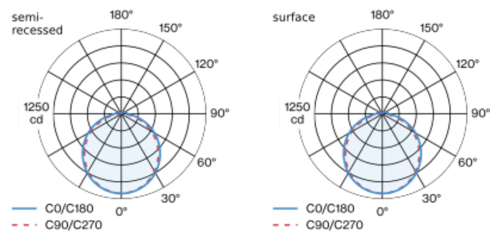

### Product drawing



<sup>1</sup> semi-recessed <sup>2</sup> surface <sup>3</sup> RAL code  
<sup>4</sup> Value of containing product at full load (undimmed)  
<sup>5</sup> incl. optical losses and the efficiency of the operating device (converter)

### Installation instructions



# LENO jut-out

semi-recessed / surface system

051-8216637J 051-8920187



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.95	0.93	0.91	0.9
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF <sup>a</sup> Room Surface Maintenance Factor		
MF	Maintenance Factor		LLMF Lamp Lumens Maintenance Factor		
LMF <sup>a</sup>	Luminaire Maintenance Factor		LSF Lamp Survival Faktor		

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	18
B13	24
B16	30
B20	37
C10	31
C13	40
C16	51
C20	62

## Components

### INSTALLATION CHANNEL

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
1830 mm	traffic white	1830-89-28	051-8920187



### Mounting accessories

#### END CAPS

COLOUR	ARTICLE NUMBER(S)
pure white	051-8992217
jet black	051-8992218



### Mounting accessories

#### LINEAR CONNECTOR

TYPE	ARTICLE NUMBER(S)
1 pair	051-8992110
10 pairs	051-8992110:10



#### POWER FEEDER CONNECTOR

ARTICLE NUMBER(S)
051-8992330



### Other accessories

#### DISMOUNTING TOOL

TYPE	ARTICLE NUMBER(S)
vacuum cup	086-30000

