

# MOVE IT 25 track


050-7304018



Project / Type

Notes

Count / Date

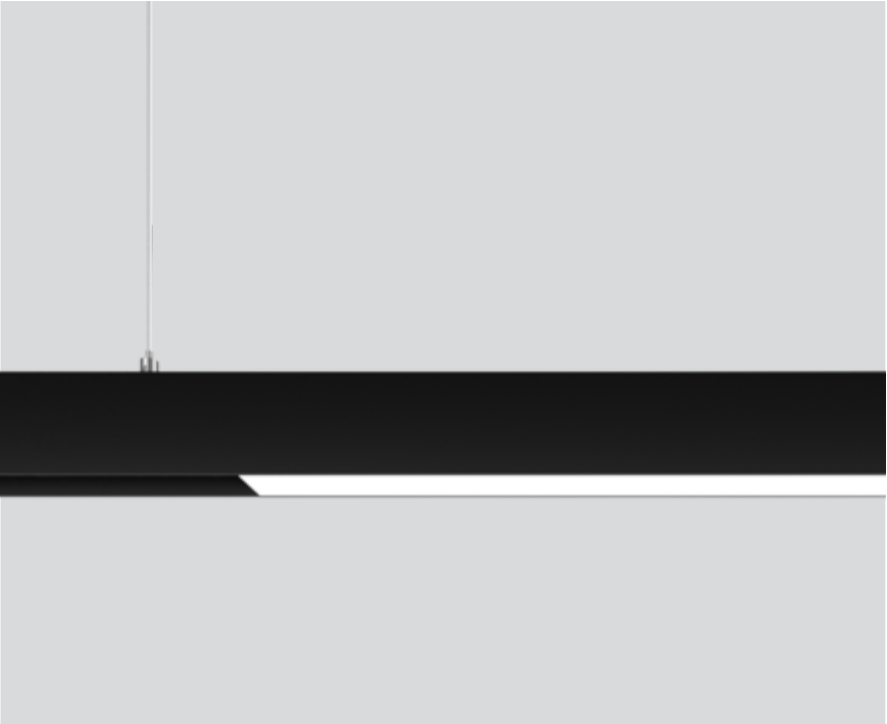

General

Ceiling , Suspended

black , RAL 9005 <sup>1</sup>

IP20

Electrical

non DIM

48 V

PC3

Physical

length 1220 mm

width 31 mm

height 60 mm

1.25 kg

<sup>1</sup> RAL code

Installation instructions



Extruded aluminium profile with 28mm width groove; for wall-/ceiling surface mounting or suspended mounting (1500 mm cable suspension as an accessory); height adjustment without tools; with integrated power rail profile for supply voltage feed; surface anodised black; light insets can be installed and moved without tools by means of magnetic holders+locking; degree of protection IP20; PC3; 48 V; sound absorbing accessories for installation in the MOVE IT suspended system available; accessories are listed separately;

Product drawing



# MOVE IT 25 track

050-7304018



Project / Type

Notes

Count / Date

## Mounting accessories

### NODE CONNECTOR

| TYPE         | COLOUR          | Ø (MM) | ARTICLE NUMBER(S) |
|--------------|-----------------|--------|-------------------|
| chrome cable | traffic white   | 64     | 050-2033137       |
| chrome cable | jet black       | 64     | 050-2033138       |
| chrome cable | special colours | 64     | 050-203313X       |
| black cable  | traffic white   | 64     | 050-2033147       |
| black cable  | jet black       | 64     | 050-2033148       |
| black cable  | special colours | 64     | 050-203314X       |
| chrome cable | traffic white   | 64     | 050-2022237       |
| chrome cable | jet black       | 64     | 050-2022238       |
| chrome cable | special colours | 64     | 050-202223X       |
| black cable  | traffic white   | 64     | 050-2022247       |
| black cable  | jet black       | 64     | 050-2022248       |
| black cable  | special colours | 64     | 050-202224X       |



### NODE END CAP

| TYPE                       | COLOUR          | ARTICLE NUMBER(S) |
|----------------------------|-----------------|-------------------|
| incl. electrical connector | jet black       | 050-7300108       |
| incl. electrical connector | white / black   | 050-730010P       |
| incl. electrical connector | special colours | 050-730010X       |



### WALL MOUNTING ACCESSORY

| TYPE       | L-W-H (MM) | ARTICLE NUMBER(S) |
|------------|------------|-------------------|
| mechanical | 28-10-5    | 050-2044118       |



## Mounting accessories

### MECHANICAL LINEAR CONNECTOR

| COLOUR | ARTICLE NUMBER(S) |
|--------|-------------------|
| chrome | 050-2011310       |
| black  | 050-2011318       |



### MECHANICAL LINEAR CONNECTOR SURFACE

| ARTICLE NUMBER(S) |
|-------------------|
| 050-2011410       |



### MECHANICAL & ELECTRICAL LINEAR CONNECTOR

| ARTICLE NUMBER(S) |
|-------------------|
| 050-2031230       |



### CURVE CONNECTOR

| TYPE                             | COLOUR          | L-W-H (MM) | ARTICLE NUMBER(S) |
|----------------------------------|-----------------|------------|-------------------|
| mechanical & electrical R 300 mm | jet black       | 416-31-60  | 050-7303038       |
| mechanical & electrical R 300 mm | gold / black    | 416-31-60  | 050-730303G       |
| mechanical & electrical R 300 mm | white / black   | 416-31-60  | 050-730303P       |
| mechanical & electrical R 300 mm | special colours | 416-31-60  | 050-730303X       |
| mechanical R 300 mm              | jet black       | 416-31-60  | 050-7303118       |
| mechanical R 300 mm              | gold / black    | 416-31-60  | 050-730311G       |
| mechanical R 300 mm              | white / black   | 416-31-60  | 050-730311P       |
| mechanical R 300 mm              | special colours | 416-31-60  | 050-730311X       |



[\*050-7304018] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

# MOVE IT 25 track

050-7304018



Project / Type

Notes

Count / Date

## Mounting accessories

### CABLE SUSPENSION

| COLOUR | ARTICLE NUMBER(S) |
|--------|-------------------|
| chrome | 005-2152110       |
| black  | 005-2152118       |



### CANOPY

| COLOUR        | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------|------------|-------------------|
| traffic white | 90-90-22   | 005-2311717       |
| jet black     | 90-90-22   | 005-2311718       |



### CEILING FASTENER

| COLOUR        | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------|------------|-------------------|
| traffic white | 67-31-8    | 050-2041117       |
| jet black     | 67-31-8    | 050-2041118       |



## Electrical accessories

### POWER FEEDER UNIT

| TYPE    | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------|------------|-------------------|
| non DIM | 78-28-6    | 050-2020110       |
| DALI-2  | 78-28-6    | 050-2020130       |



## Electrical accessories

### POWER SUPPLY INTRACK

| TYPE                        | L-W-H (MM) | ARTICLE NUMBER(S) |
|-----------------------------|------------|-------------------|
| 100 W   incl. cable 2000 mm | 403-26-46  | 050-2071038       |
| 150 W   incl. cable 2000 mm | 403-26-46  | 050-2071138       |



# MOVE IT 25 track

050-7304018



Project / Type

Notes

Count / Date

## Electrical accessories

### POWER SUPPLY SURFACE

| COLOUR        | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------|------------|-------------------|
| traffic white | 305-144-54 | 050-2055117       |
| jet black     | 305-144-54 | 050-2055118       |
| traffic white | 305-144-54 | 050-2055137       |
| jet black     | 305-144-54 | 050-2055138       |
| traffic white | 455-104-40 | 050-2055417       |
| jet black     | 455-104-40 | 050-2055418       |
| traffic white | 455-104-40 | 050-2055437       |
| jet black     | 455-104-40 | 050-2055438       |
| traffic white | 455-104-40 | 050-2055217       |
| jet black     | 455-104-40 | 050-2055218       |
| traffic white | 455-104-40 | 050-2055237       |
| jet black     | 455-104-40 | 050-2055238       |
| traffic white | 455-104-40 | 050-2055517       |
| jet black     | 455-104-40 | 050-2055518       |
| traffic white | 455-104-40 | 050-2055537       |
| jet black     | 455-104-40 | 050-2055538       |
| traffic white | 305-144-54 | 050-2055317       |
| jet black     | 305-144-54 | 050-2055318       |
| traffic white | 305-144-54 | 050-2055337       |
| jet black     | 305-144-54 | 050-2055338       |



## Electrical accessories

### POWER SUPPLY EXTERNAL

| TYPE  | L-W-H (MM) | ARTICLE NUMBER(S) |
|-------|------------|-------------------|
| 60 W  | 163-43-32  | 002-62133         |
| 100 W | 350-30-18  | 002-62134         |
| 150 W | 350-30-18  | 002-62135         |
| 250 W | 400-40-22  | 002-62139         |
| 320 W | 252-90-44  | 002-60320         |



## Optional electrical accessories

### DIN RAIL POWER SUPPLY

| TYPE  | L-W-H (MM) | ARTICLE NUMBER(S) |
|-------|------------|-------------------|
| 160 W | 72-90-63   | 005-6520210       |



### DIN RAIL POWER SUPPLY PRO

| TYPE  | L-W-H (MM)  | ARTICLE NUMBER(S) |
|-------|-------------|-------------------|
| 240 W | 60-125-100  | 005-6220110       |
| 480 W | 100-125-120 | 005-6220210       |



## Electrical accessories

### DALI-2 SELV DEVICE

| TYPE         | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------------|------------|-------------------|
| control unit | 212-37-26  | 050-2061130       |



### ESSENTIAL SENSOR

| TYPE                  | L-W-H (MM) | ARTICLE NUMBER(S) |
|-----------------------|------------|-------------------|
| brightness & presence | 125-28-45  | 050-2063178       |



[050-7304018] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

06.04.2025

# MOVE IT 25 track

050-7304018



Project / Type

Notes

Count / Date

## Optical accessories

### BLIND COVER

| TYPE    | COLOUR    | ARTICLE NUMBER(S) |
|---------|-----------|-------------------|
| 1217 mm | jet black | 050-7004008       |
| 2417 mm | jet black | 050-7008008       |
| 3622 mm | jet black | 050-7009008       |



### END CAPS

| TYPE   | COLOUR          | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------|-----------------|------------|-------------------|
| 1 pair | jet black       | 60-31-3    | 050-7300008       |
| 1 pair | gold / black    | 60-31-3    | 050-730000G       |
| 1 pair | white / black   | 60-31-3    | 050-730000P       |
| 1 pair | special colours | 60-31-3    | 050-730000X       |

