

TULA micro suspended

MOVE IT 25 / 25 S / 45


050-181543XM



Project / Type _____

Notes _____

Count / Date _____

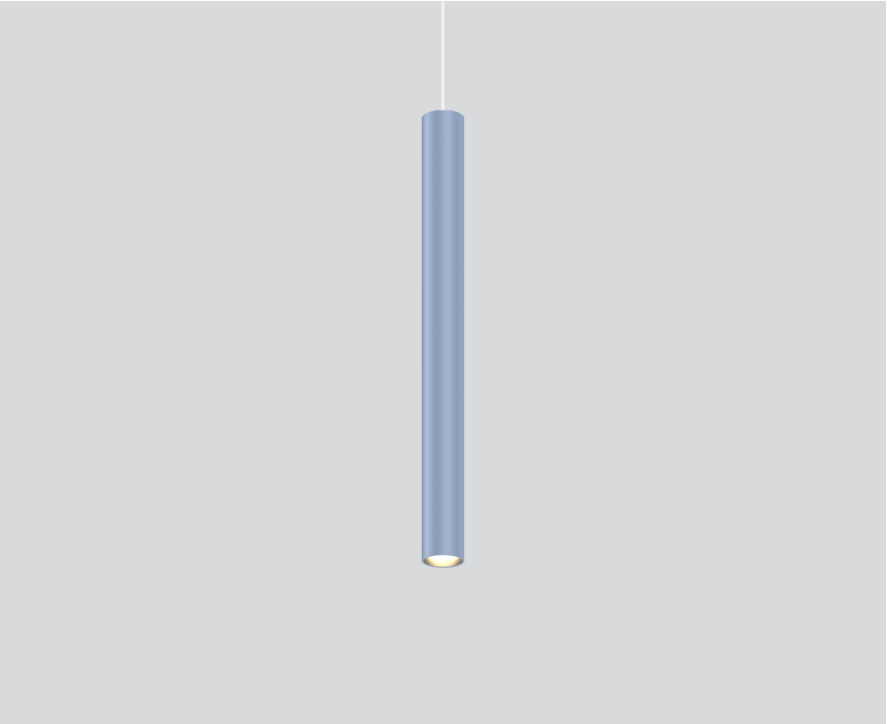

General

Ceiling , Suspended _____

special colours _____

IP20 _____

972 lm _____

optical inset 81 lm/W¹ _____

LED

2700 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

R_g: 96 , R_r: 90 , R_{t(1-15)}: 88 _____

MR 0.55 _____

MDER 0.5 _____

Optical

medium _____

beam angle 25° _____

PstLM ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrical

DALI-2 _____

48 V _____

fixture 14.1 W _____

fixture 69 lm/W³ _____

optical inset 12.0 W _____

PC3 _____

1 DALI Addr. _____

Physical

diameter 47 mm _____

height 500 mm _____

0.7 kg _____


2000 mm with hook _____

¹ OPTICAL INSET: incl. consideration of optical losses

² Value of containing product at full load (undimmed)

³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Light distribution



medium 25°

h (m)	E0° (lx)	ø (m)
1	4200	0.44
2	1050	0.89
3	470	1.33
4	260	1.78
5	170	2.22

Product drawing



Installation instructions



Lighting calculator



[050-181543XM] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com