

L24 OFFICE

MOVE IT 45


050-3213D38R



Project / Type

Notes

Count / Date

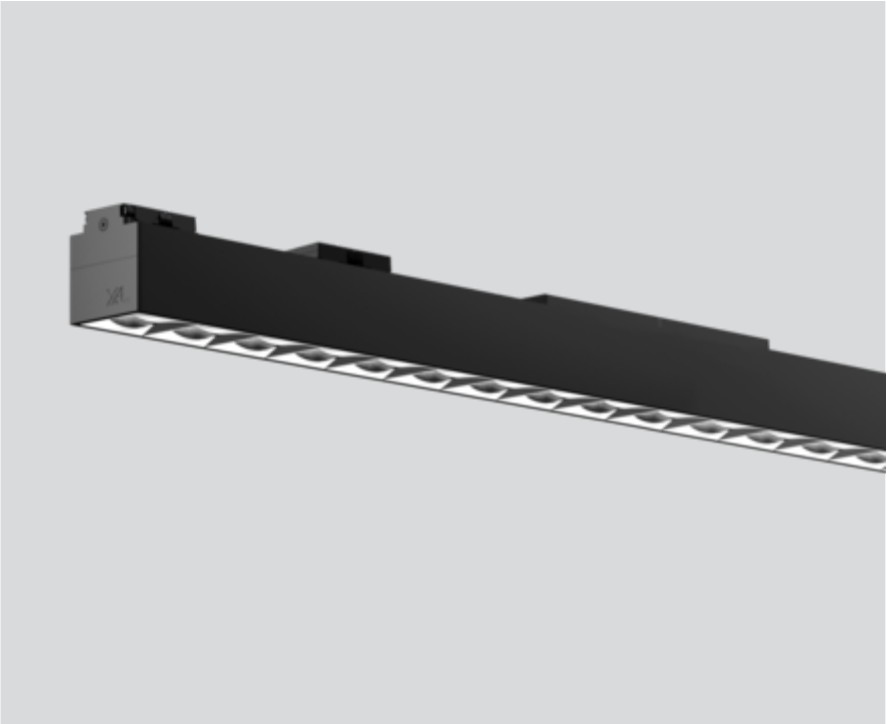

General

Ceiling , Track

black , RAL9005 ¹

Reflector chrome

IP20

2800 lm

LED

tunable white

2700 K - 6500 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.48

MDER 0.44

Optical

symmetric

beam angle 69°


UGR < 19 , ≥65° <1500 cd/m²

PstLM ≤ 1.0 ²


SVM ≤ 0.4 ²

Linear light inset made of aluminium; surface anodised black; light inset can be installed and moved without tools by means of magnetic holders+locking; flush with profile system; power supplied via MOVE IT system track profile; hot plug protection; equipped with 24 specially computed OFFICE light elements; high gloss reflector with faceted design; Reflector chrome; precise radiation characteristic with symmetrical light distribution; UGR ≤ 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; passive cooling of the LEDs through improved heat sink geometry; light colour: tunable white diodes (2700-6500 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC3 48V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source not replaceable;

Light distribution



Product drawing



Electrical

DALI-2 DT8

system 20.2 W

PC3 48V

system 139 lm/W³

1 DALI Addr.

Physical

length 906 mm

width 43 mm

height 48 mm

1.12 kg

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions



Lighting calculator





Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.92	0.9
LSF	1	1	1	1	1

MF

MF

LMF^a

LMF × RSMF × LLMF × LSF

Maintenance Factor

Luminaire Maintenance Factor

RSMF^a

LLMF

LSF

Room Surface Maintenance Factor

Lamp Lumens Maintenance Factor

Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.