




Project / Type _____

Notes _____

Count / Date _____

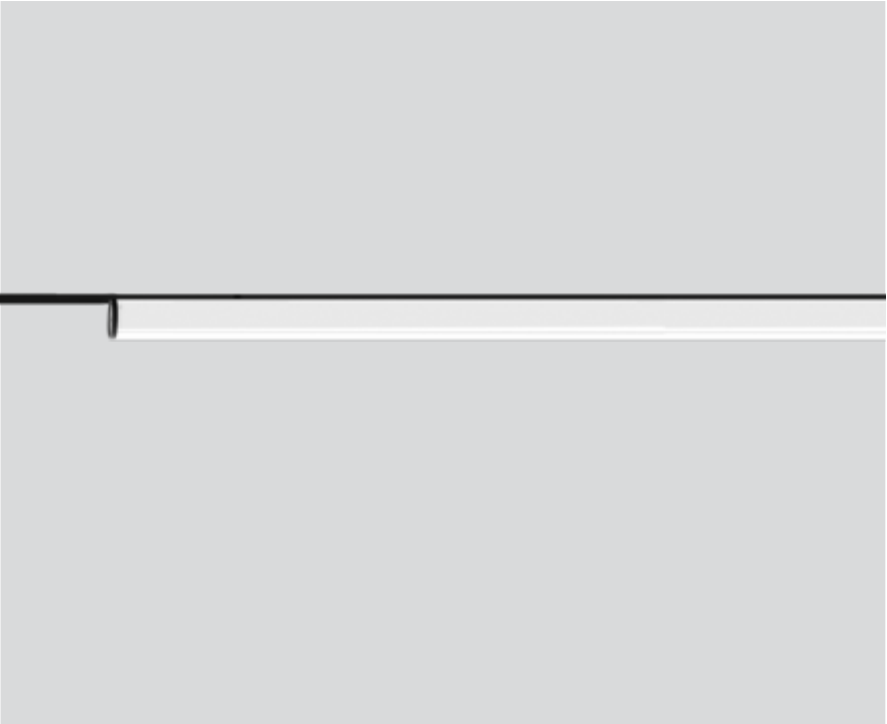

General	
Ceiling / Wall , Track	_____
rotation 360°	_____
black , RAL 9005 ¹	_____
IP20	_____
1890 lm	_____
2100 lm/m	_____
optical inset 170 lm/W ²	_____


LED	
3000 K	_____
CRI ≥ 80	_____
L90 / 50000 h	_____
initial MacAdam ≤ 3 SDCM	_____
MR 0.54	_____
MDER 0.49	_____

Optical	
opal (lambertsch)	_____
PstLM ≤ 1.0 ³	_____
SVM ≤ 0.4 ³	_____


Electrical	
DALI-2	_____
48 V	_____
fixture 15.9 W	_____
optical inset 11.1 W	_____
PC3	_____
1 DALI Addr.	_____
18 W/m	_____

Physical	
length 910 mm	_____
width 33 mm	_____
height 33 mm	_____
0.4 kg	_____

Light distribution



Product drawing



¹ RAL code

² OPTICAL INSET: incl. consideration of optical losses

³ Value of containing product at full load (undimmed)

Installation instructions

