


# ARY adjustable rod suspended

MOVE IT 25 / 25 S / 45  
050-063143XF



Project / Type \_\_\_\_\_  
Notes \_\_\_\_\_  
Count / Date \_\_\_\_\_

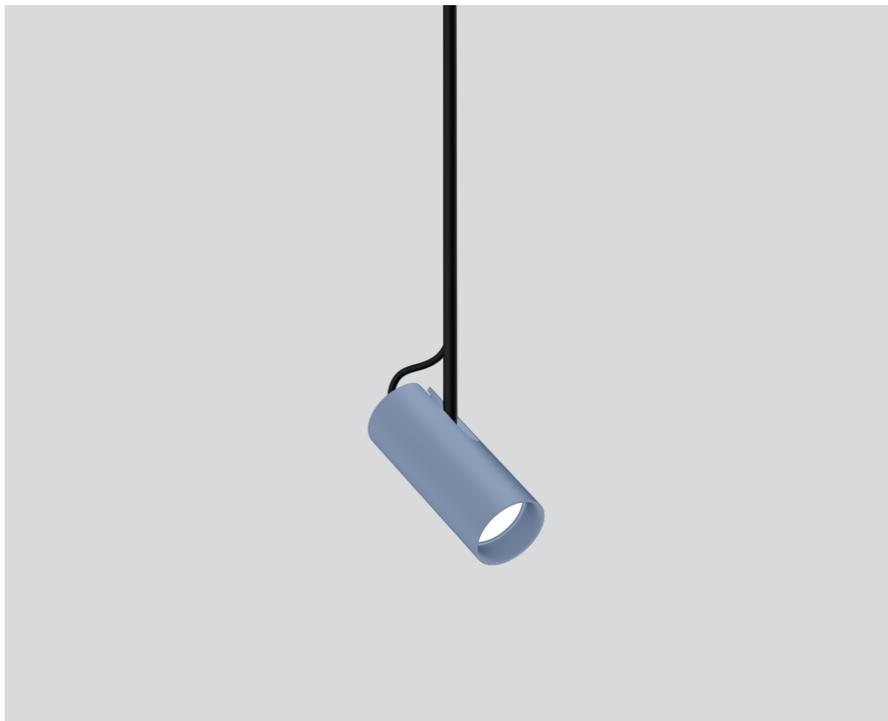

## General

Ceiling , Track Suspended  
tilt max 90°  
rotation 265°  
special colours \_\_\_\_\_  
IP20  
1040 lm  
optical inset 87 lm/W<sup>1</sup>

## LED

2700 K  
CRI ≥ 90  
L90 / 50000 h  
initial MacAdam ≤ 3 SDCM  
R<sub>g</sub>: 96 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 88  
MR 0.55  
MDER 0.5

## Optical

flood  
beam angle 44°  
P<sub>stLM</sub> ≤ 1.0<sup>2</sup>  
SVM ≤ 0.4<sup>2</sup>

## Electrical


DALI-2  
48 V  
fixture 14.1 W  
fixture 74 lm/W<sup>3</sup>  
optical inset 12.0 W  
PC3  
1 DALI Addr.

## Physical

rod 1500 mm with hook  
diameter 47 mm  
height 110 mm  
0.5 kg

Decorative pendant light inset made of aluminium; surface special colours powder coated; light inset can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; height adjustable U-profile pendant rod suspension (special colours) 1500mm, feed 2000mm (1500mm in U-profile), incl. ceiling mounting ring + hook (special colours) for multiple positioning of the luminaire in the room; spotlight head 265° rotatable and 90° tiltable; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 44° beam; degree of protection IP20; PC3; 48 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source not replaceable;


## Light distribution



flood 44°

h (m)	E0° (lx)	ø (m)
1	1930	0.82
2	480	1.64
3	210	2.45
4	120	3.27
5	80	4.09

## Product drawing



<sup>1</sup> OPTICAL INSET: incl. consideration of optical losses

<sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions



## Lighting calculator



# ARY adjustable rod suspended

MOVE IT 25 / 25 S / 45  
050-063143XF



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.97	0.96	0.95	0.94
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF RSMF<sup>a</sup> Room Surface Maintenance Factor  
 MF Maintenance Factor LLMF Lamp Lumens Maintenance Factor  
 LMF<sup>a</sup> Luminaire Maintenance Factor LSF Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Mounting accessories

### RING TRACK MOUNTED

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
traffic white	50	050-0510117
jet black	50	050-0510118



### RING CEILING MOUNTED

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
traffic white	50	050-0510217
jet black	50	050-0510218



## Optical accessories

### OVAL LENS

Ø (MM)	ARTICLE NUMBER(S)
42	007-1965880



### SOFT LENS

Ø (MM)	ARTICLE NUMBER(S)
42	007-1965980



### WALLWASHER LENS

Ø (MM)	ARTICLE NUMBER(S)
42	007-1965780

