


ARY adjustable rod suspended

MOVE IT 25 / 25 S / 45
050-063143XF



Project / Type _____
Notes _____
Count / Date _____

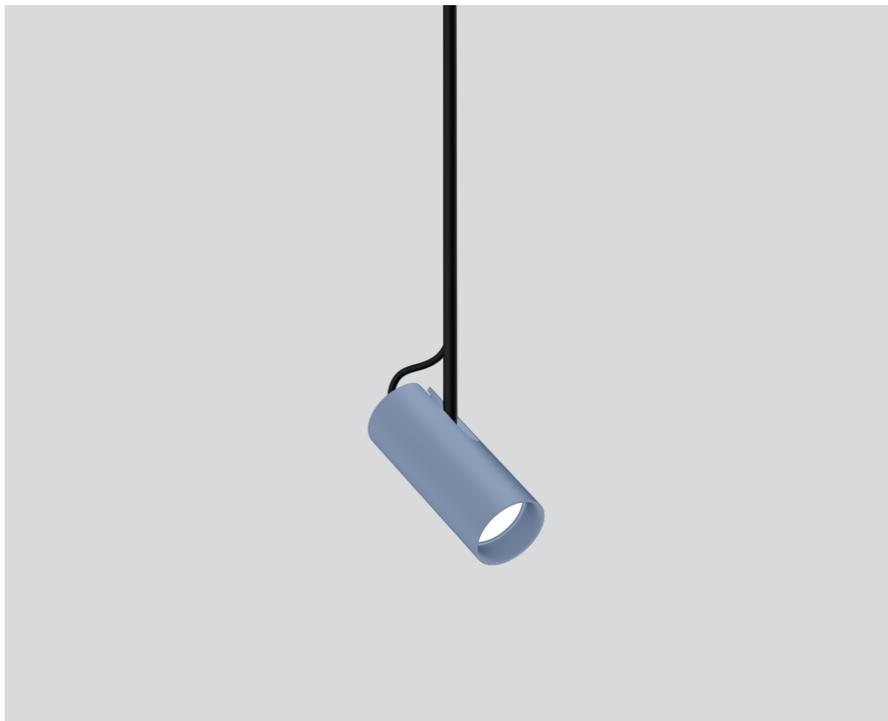

General

Ceiling , Track Suspended
tilt max 90°
rotation 265°
special colours _____
IP20
1040 lm
optical inset 87 lm/W¹

LED

2700 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 96 , R_r: 90 , R_{t(1-15)}: 88
MR 0.55
MDER 0.5

Optical

flood
beam angle 44°
P_{stLM} ≤ 1.0²
SVM ≤ 0.4²

Electrical


DALI-2
48 V
fixture 14.1 W
fixture 74 lm/W³
optical inset 12.0 W
PC3
1 DALI Addr.

Physical

rod 1500 mm with hook
diameter 47 mm
height 110 mm
0.5 kg

Decorative pendant light inset made of aluminium; surface special colours powder coated; light inset can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; height adjustable U-profile pendant rod suspension (special colours) 1500mm, feed 2000mm (1500mm in U-profile), incl. ceiling mounting ring + hook (special colours) for multiple positioning of the luminaire in the room; spotlight head 265° rotatable and 90° tiltable; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 44° beam; degree of protection IP20; PC3; 48 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source not replaceable;


Light distribution



flood 44°

h (m)	E0° (lx)	ø (m)
1	1930	0.82
2	480	1.64
3	210	2.45
4	120	3.27
5	80	4.09

Product drawing



¹ OPTICAL INSET: incl. consideration of optical losses

² Value of containing product at full load (undimmed)

³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

