


ARY adjustable rod suspended

MOVE IT 25 / 25 S / 45
050-053161XM



Project / Type _____
Notes _____
Count / Date _____

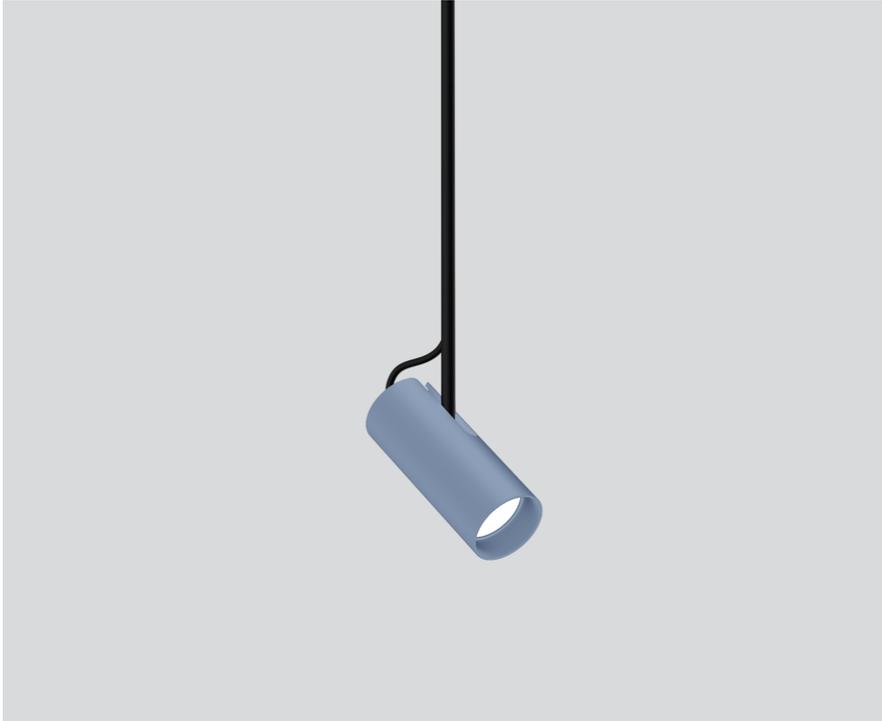

General

Ceiling , Track Suspended
tilt max 90°
rotation 265°
special colours
IP20
1090 lm
optical inset 91 lm/W¹

LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 96 , R_r: 89 , R_{t(1-5)}: 89
MR 0.84
MDER 0.76

Optical

medium
beam angle 25°
P_{stLM} ≤ 1.0²
SVM ≤ 0.4²

Electrical

non DIM
48 V
fixture 14.1 W
optical inset 12.0 W
PC3


Physical

rod 1500 mm
diameter 47 mm
height 110 mm
0.45 kg

¹ OPTICAL INSET: incl. consideration of optical losses
² Value of containing product at full load (undimmed)

Decorative pendant light inset made of aluminium; surface special colours powder coated; light inset can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; height adjustable U-profile pendant rod suspension (special colours) 1500mm, feed in U-profile; spotlight head 265° rotatable and 90° tiltable; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 25° beam; degree of protection IP20; PC3; 48 V; non-dimmable; light source not replaceable;


Light distribution



medium 25°

h (m)	E0° (lx)	ø (m)
1	4710	0.44
2	1180	0.89
3	520	1.33
4	290	1.78
5	190	2.22

Product drawing



Installation instructions



Lighting calculator

