TULA nano suspended

MOVE IT 25 / 25 S / 45

050-0711414M

Project / Type

Notes

Count / Date

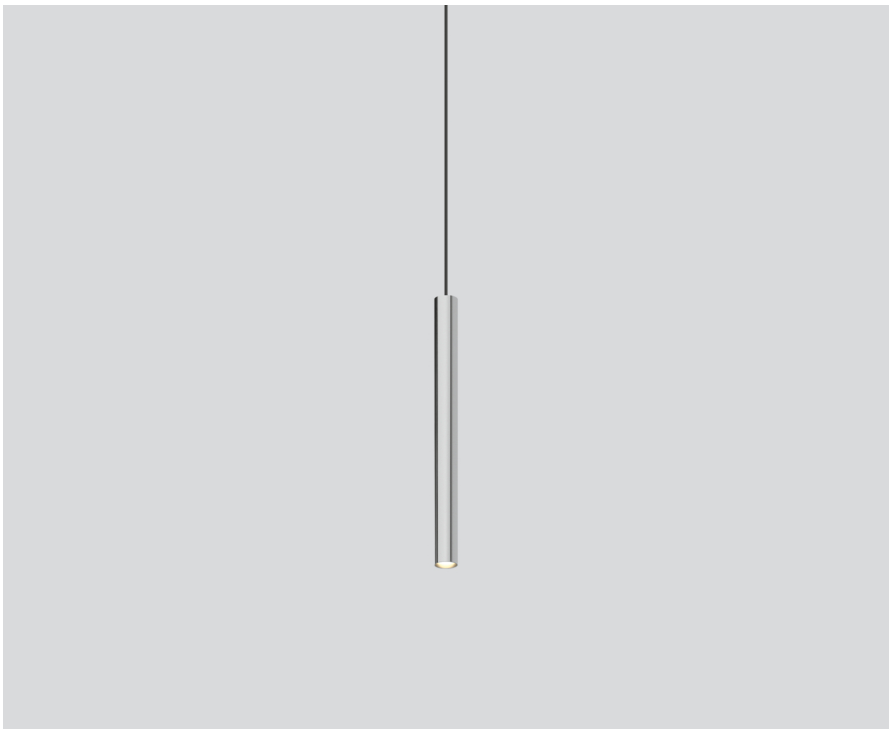

Decorative pendant light inset made of aluminium; surface polished chrome; light inset can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; pendant fitting with 1500mm suspension, incl. feed (black), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 24° beam; degree of protection IP20; PC3; non-dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

III | X-PERT | UGR ≤22 | CRI ≥90 | X-PERT

General

Ceiling , Suspended
chrome
IP20
691 lm

LED

2700 K
CRI ≥ 90
initial MacAdam ≤ 2 SDCM
R_g: 99 , R_f: 91 , $R_{f\{1\text{-}15\}}$: 89
MR 0.53
MDER 0.48

Optical

medium
beam angle 24°

Electrical

non DIM
12.1 W
PC3
57 lm/W

Physical

diameter 26 mm
height 300 mm
0.25 kg
1500 mm

Light distribution



medium 24°

h (m)	E0° (lx)	ø (m)
1	2820	0.43
2	700	0.85
3	310	1.28
4	180	1.71
5	110	2.13

Product drawing



Installation instructions

Lighting calculator

['050-0711414M'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

02.10.2024