

# TULA nano suspended

MOVE IT 25 / 25 S / 45


050-0711414M



Project / Type

Notes

Count / Date

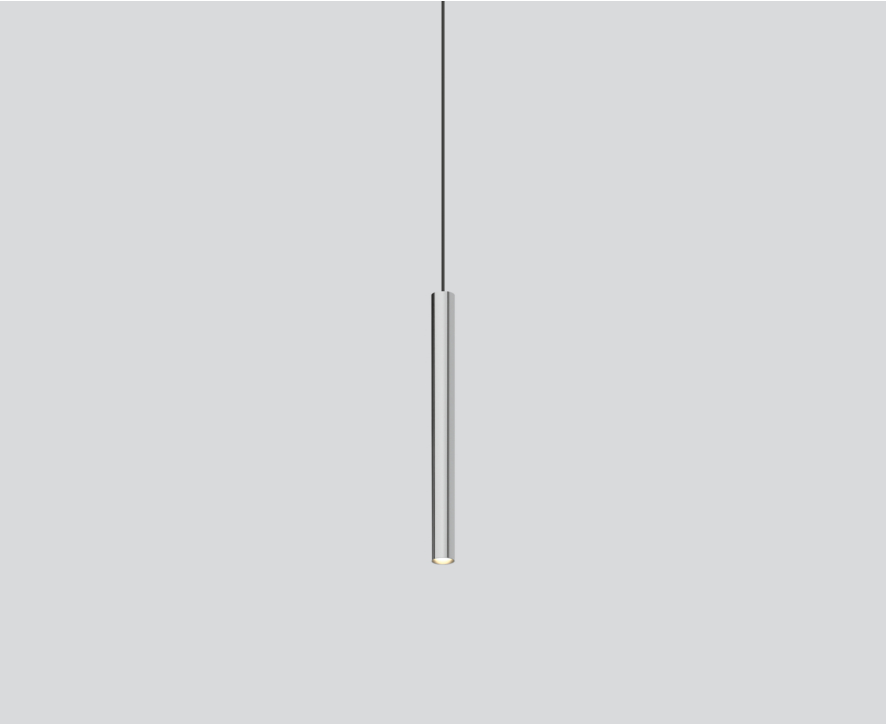

Decorative pendant light inset made of aluminium; surface polished chrome; light inset can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; pendant fitting with 1500mm suspension, incl. feed (black), can be individually shortened; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 24° beam; degree of protection IP20; PC3; non-dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

III

X-PERT

UGR  
 $\leq 22$

CRI  
 $\geq 90$

X-PERT

### General

Ceiling , Suspended

chrome

IP20

691 lm

### LED

2700 K

CRI  $\geq 90$

initial MacAdam  $\leq 2$  SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 89

MR 0.53

MDER 0.48

### Optical

medium

beam angle 24°

### Electrical

non DIM

12.1 W

PC3

57 lm/W

### Physical


diameter 26 mm

height 300 mm

0.25 kg

1500 mm

### Light distribution



medium 24°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 2820     | 0.43  |
| 2     | 700      | 0.85  |
| 3     | 310      | 1.28  |
| 4     | 180      | 1.71  |
| 5     | 110      | 2.13  |

### Product drawing



### Installation instructions



### Lighting calculator



# TULA nano suspended

MOVE IT 25 / 25 S / 45

050-0711414M



Project / Type

Notes

Count / Date

## Mounting accessories

### RING TRACK MOUNTED

| COLOUR        | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 50     | 050-0510117       |
| jet black     | 50     | 050-0510118       |



### RING CEILING MOUNTED

| COLOUR        | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 50     | 050-0510217       |
| jet black     | 50     | 050-0510218       |



## Optical accessories

### OVAL LENS

| Ø (MM) | ARTICLE NUMBER(S) |
|--------|-------------------|
| 42     | 007-1965880       |



### SOFT LENS

| Ø (MM) | ARTICLE NUMBER(S) |
|--------|-------------------|
| 42     | 007-1965980       |



### WALLWASHER LENS

| Ø (MM) | ARTICLE NUMBER(S) |
|--------|-------------------|
| 42     | 007-1965780       |

