

# WALLWASHER FLUSH

MOVE IT 25


050-0212438A



Project / Type \_\_\_\_\_


Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

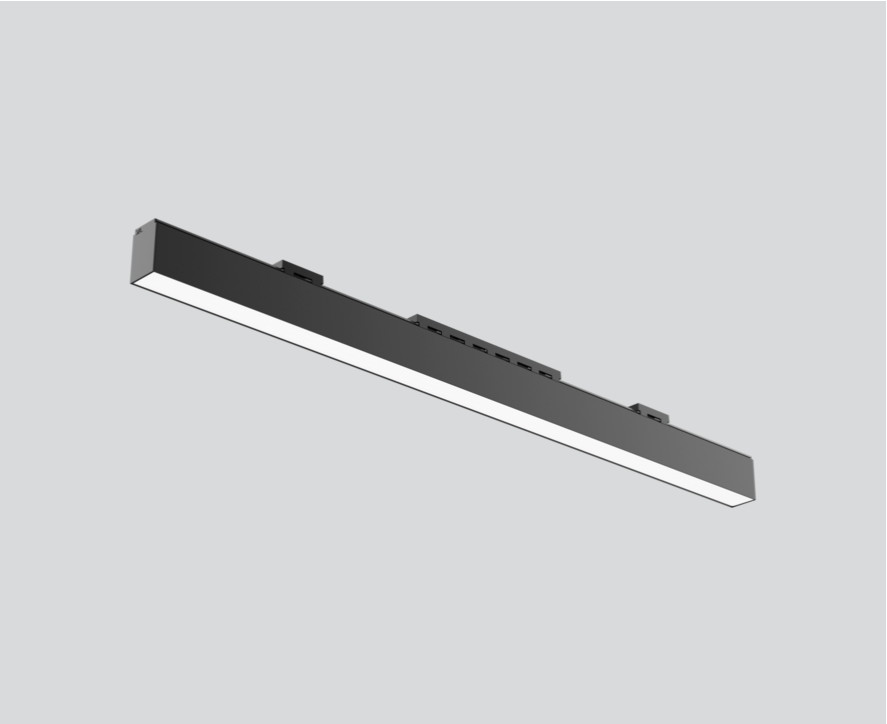


Linear light inset made of aluminium; surface anodised black; light inset can be installed and moved without tools by means of magnetic holders+locking; flush with profile system; power supplied via MOVE IT system track profile; hot plug protection; with specially computed, asymmetric lens for homogeneous vertical lighting intensity; optical attachment available as accessory; accessories are listed separately; passive cooling of the LEDs through improved heat sink geometry; with CSP (Chip-Scale-Packaging) technology for maximum efficiency; light colour 2700 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC3 48V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source not replaceable;

## Light distribution



## Product drawing



### General

Ceiling / Wall , Track \_\_\_\_\_

black , RAL9005 <sup>1</sup> \_\_\_\_\_

IP20 \_\_\_\_\_

829 lm \_\_\_\_\_

### LED

2700 K \_\_\_\_\_

CRI  $\geq 90$  \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam  $\leq 3$  SDCM \_\_\_\_\_

R<sub>g</sub>: 95 , R<sub>f</sub>: 92 , R<sub>(1-15)</sub>: 90 \_\_\_\_\_

MR 0.45 \_\_\_\_\_

MDER 0.41 \_\_\_\_\_

### Optical

wallwasher \_\_\_\_\_

PstLM  $\leq 1.0$  <sup>2</sup> \_\_\_\_\_

SVM  $\leq 0.4$  <sup>2</sup> \_\_\_\_\_

### Electrical

DALI-2 single control \_\_\_\_\_

system 11.2 W \_\_\_\_\_

PC3 48V \_\_\_\_\_

system 74 lm/W<sup>3</sup> \_\_\_\_\_

1 DALI Addr. \_\_\_\_\_

### Physical

length 605 mm \_\_\_\_\_

width 25 mm \_\_\_\_\_

height 45 mm \_\_\_\_\_

0.4 kg \_\_\_\_\_

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

## Installation instructions

