

# PIVOT MOVE IT 25 / 25 S / 45 suspended

050-03254380



Project / Type

Notes

Count / Date



## General

Ceiling , Track Suspended

rotation 360°

black , RAL 9005 <sup>1</sup>

IP20

2970 lm

1980 lm/m

optical inset 160 lm/W<sup>2</sup>

## LED

2700 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.47

MDER 0.42

## Optical

opal (lambertsch)

PstLM ≤ 1.0 <sup>3</sup>

SVM ≤ 0.4 <sup>3</sup>

## Electrical

DALI-2

48 V

fixture 26.4 W

optical inset 18.5 W

PC3

1 DALI Addr.

18 W/m

## Physical

length 1510 mm

width 33 mm

height 33 mm

0.6 kg

<sup>1</sup> RAL code


<sup>2</sup> OPTICAL INSET: incl. consideration of optical losses

<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions




## Lighting calculator

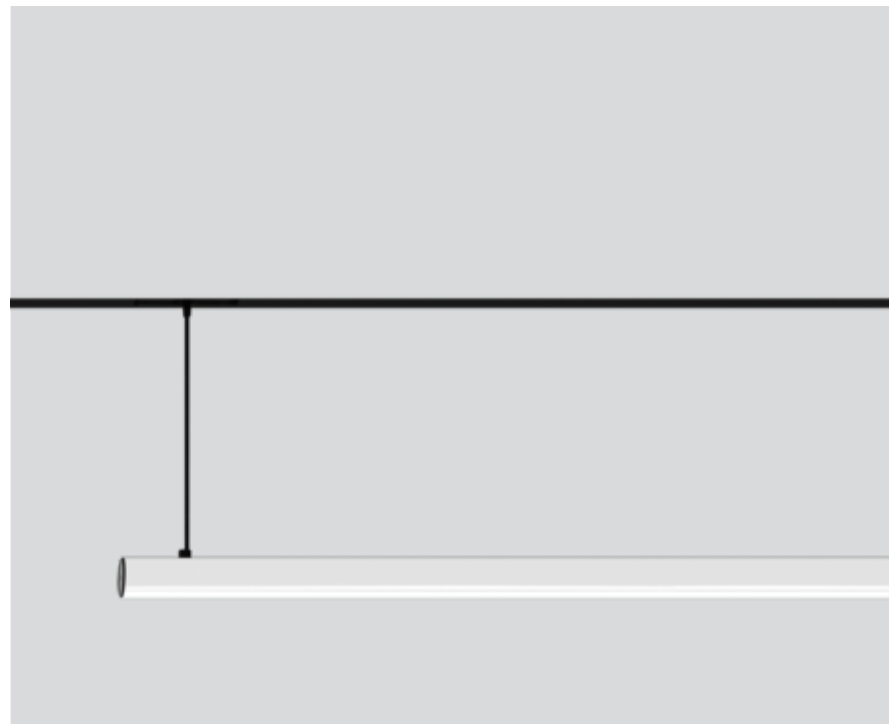

Cylindrical, decorative-graphic light inset made of aluminium and satinised PMMA for homogeneous illumination; surface anodised black; light inset can be installed and moved without tools by means of magnetic holders+locking; pendant fitting with 1500mm cable suspension; suitable for two MOVE IT 25 / 25 S / 45 profiles as well as one MOVE IT 25 / 25 S / 45 profile (axial arrangement); holders 360° rotatable; power supplied via MOVE IT system track profile; hot plug protection; passive cooling of the LEDs through improved heat sink geometry; with CSP (Chip-Scale-Packaging) technology for maximum efficiency; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC3; 48 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional;

## Light distribution



## Product drawing

