


PIVOT MOVE IT 25 / 25 S / 45 suspended

050-0323L380



Project / Type
Notes
Count / Date

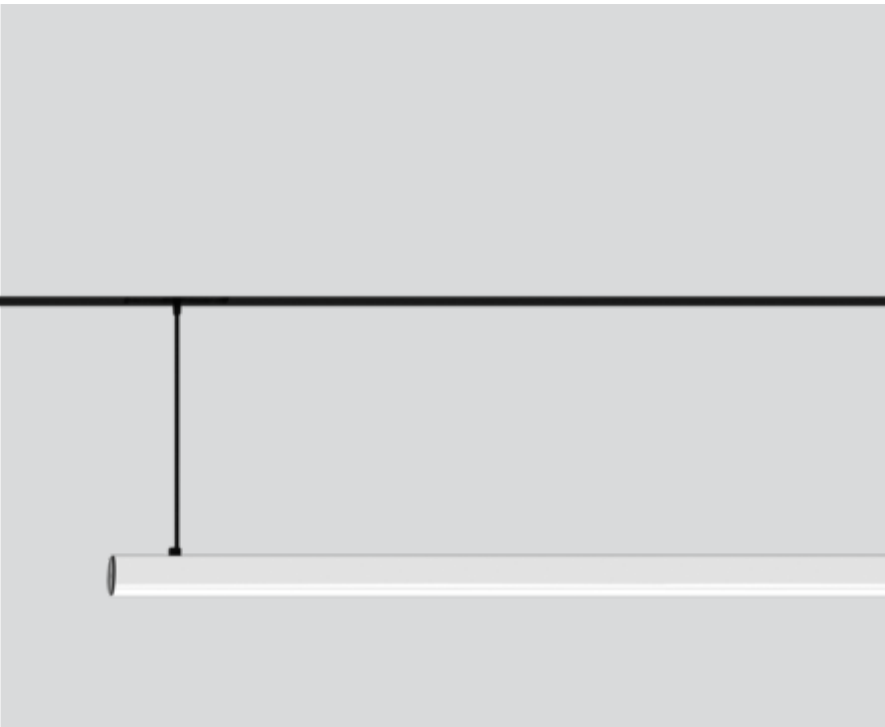

General

Ceiling , Track
rotation 360°
black , RAL9005 ¹
975 lm
Beam Angle Correspondence Sphere (360°)
Sorgente luminosa non direzionale
IP20
975 lm
Chromaticity Coordinate X: 0.388
Chromaticity Coordinate Y: 0.382

LED

tunable white
1800 K - 4000 K
CRI ≥ 80
L90 / 50000 h
photobio. safety RG 0 - no Risk
initial MacAdam ≤ 3 SDCM
MR 0.72
MDER 0.66

Optical

opal (lambertsch)

Electrical


DALI-2 DT8
7.9 W
PC3 48V
123 lm/W
1 DALI Addr.

Physical


length 910 mm
width 33 mm
height 33 mm
0.4 kg

¹ RAL code

Light distribution



Product drawing



Installation instructions



Lighting calculator

