

PIVOT MOVE IT 25 / 25 S / 45 suspended


050-0323L380



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Track _____
 rotation 360° _____
 black , RAL9005 ¹ _____
 975 lm _____
 Beam Angle Correspondence Sphere (360°) _____
 Non-directional light source _____
 IP20 _____
 975 lm _____
 Chromaticity Coordinate X: 0.388 _____
 Chromaticity Coordinate Y: 0.382 _____

LED

tunable white _____
 1800 K - 4000 K _____
 CRI ≥ 80 _____
 L90 / 50000 h _____
 photobio. safety RG 0 - no Risk _____
 initial MacAdam ≤ 3 SDCM _____
 MR 0.72 _____
 MDER 0.66 _____

Optical

opal (lambertsch) _____
 PstLM ≤ 1.0 ² _____
 SVM ≤ 0.4 ² _____


Electrical

DALI-2 DT8 _____
 system 7.9 W _____
 PC3 48V _____
 system 123 lm/W³ _____
 1 DALI Addr. _____
 non DIM _____
 Not yet specified! (use PM Converter Output Window) _____

Physical


length 910 mm _____
 width 33 mm _____
 height 33 mm _____
 0.4 kg _____

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

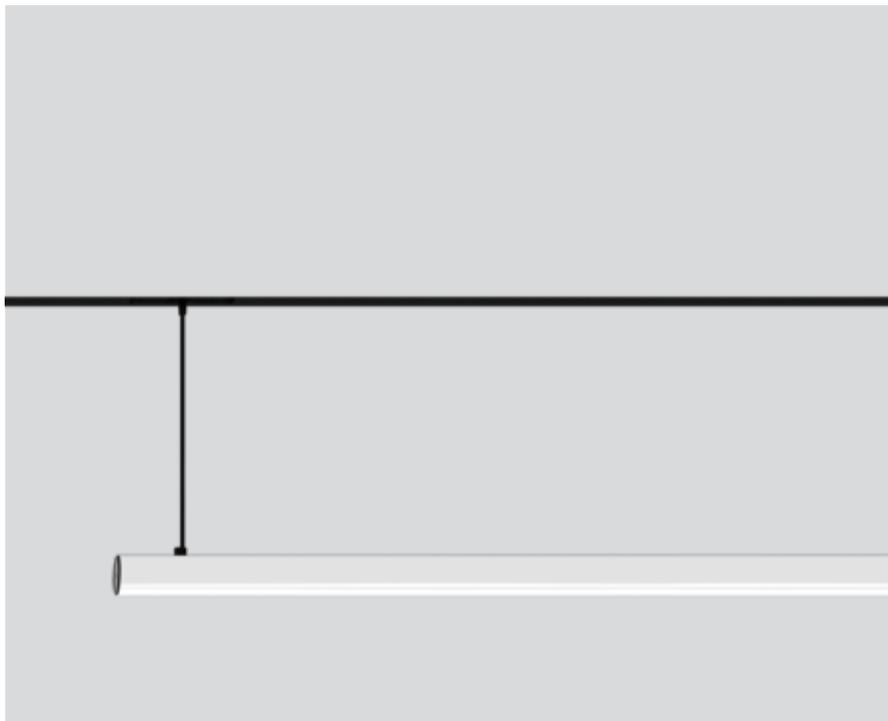


Cylindrical, decorative-graphic light inset made of aluminium and satinised PMMA for homogeneous illumination; surface anodised black; light inset can be installed and moved without tools by means of magnetic holders+locking; pendant fitting with 1500mm cable suspension; suitable for two MOVE IT 25 / 25 S / 45 profiles as well as one MOVE IT 25 / 25 S / 45 profile (axial arrangement); holders 360° rotatable; power supplied via MOVE IT system track profile; hot plug protection; passive cooling of the LEDs through improved heat sink geometry; with CSP (Chip-Scale-Packaging) technology for maximum efficiency; light colour: tunable white diodes (1800-4000 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC3 48V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



Installation instructions



Lighting calculator

