

# PIVOT MOVE IT 25 / 25 S / 45 suspended

050-03225380



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Track Suspended  
 rotation 360°  
 black , RAL 9005 <sup>1</sup>  
 IP20  
 1260 lm  
 2100 lm/m  
 optical inset 170 lm/W<sup>2</sup>

## LED

3000 K  
 CRI ≥ 80  
 L90 / 50000 h  
 initial MacAdam ≤ 3 SDCM  
 MR 0.54  
 MDER 0.49

## Optical

opal (lambertsch)  
 PstLM ≤ 1.0 <sup>3</sup>  
 SVM ≤ 0.4 <sup>3</sup>

## Electrical


DALI-2  
 48 V  
 fixture 10.6 W  
 optical inset 7.4 W  
 PC3  
 1 DALI Addr.  
 18 W/m

## Physical

length 610 mm  
 width 33 mm  
 height 33 mm  
 0.35 kg


<sup>1</sup> RAL code <sup>2</sup> incl. consideration of optical losses

<sup>3</sup> Value of containing product at full load (undimmed)

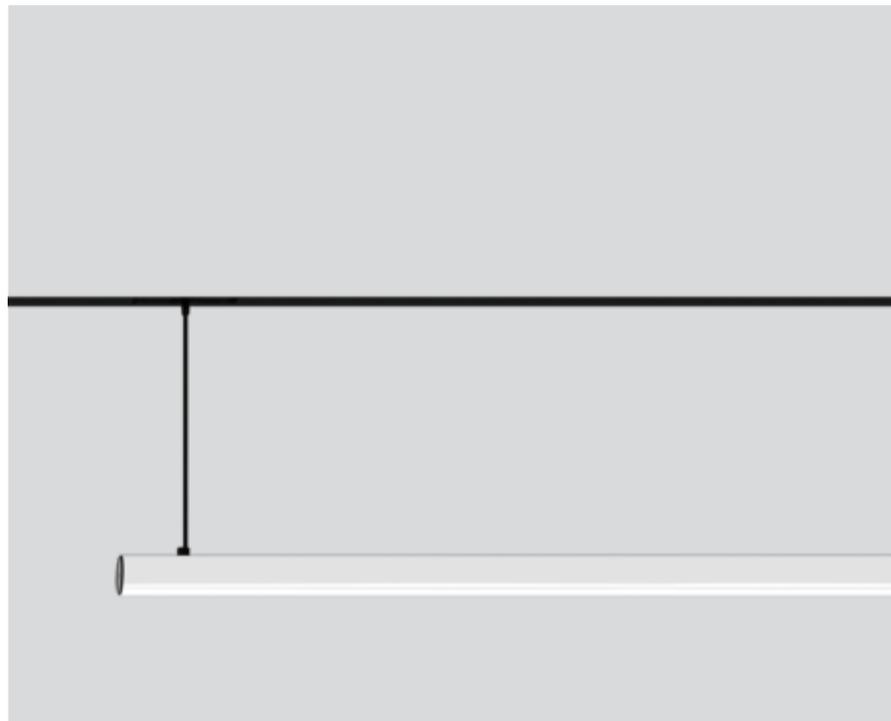


Cylindrical, decorative-graphic light inset made of aluminium and satinised PMMA for homogeneous illumination; surface anodised black; light inset can be installed and moved without tools by means of magnetic holders+locking; pendant fitting with 1500mm cable suspension; suitable for two MOVE IT 25 / 25 S / 45 profiles as well as one MOVE IT 25 / 25 S / 45 profile (axial arrangement); holders 360° rotatable; power supplied via MOVE IT system track profile; hot plug protection; passive cooling of the LEDs through improved heat sink geometry; with CSP (Chip-Scale-Packaging) technology for maximum efficiency; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC3; 48 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional;

## Light distribution



## Product drawing



## Installation instructions



## Lighting calculator

