




Project / Type _____

Notes _____

Count / Date _____

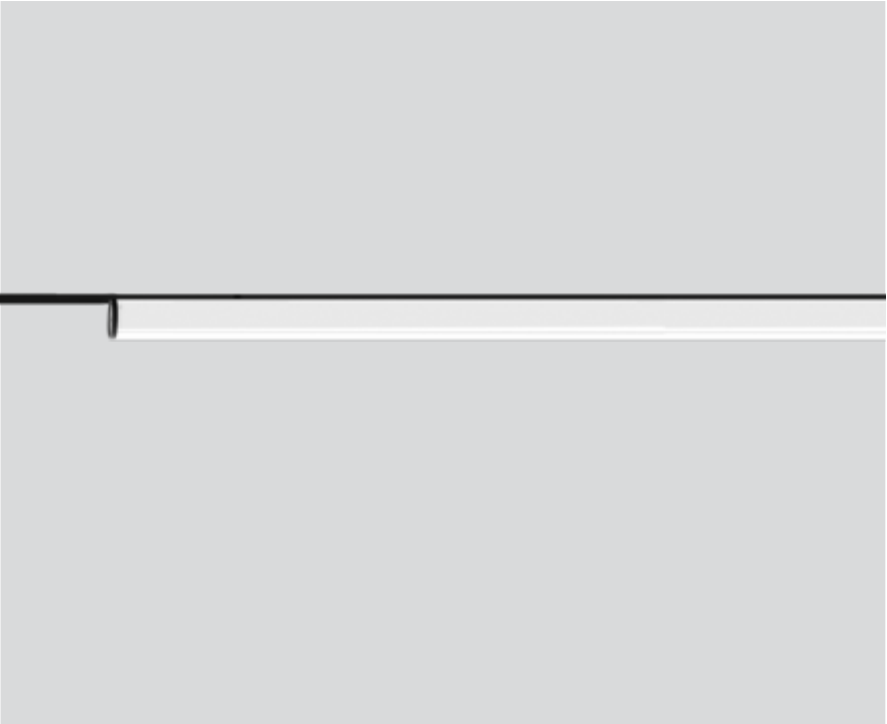


General	
Ceiling , Track	
rotation 360°	
black , RAL 9005 ¹	
IP20	
1620 lm	
1080 lm/m	
optical inset 175 lm/W ²	

LED	
tunable white	
1800 K - 4000 K	
CRI ≥ 80	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
MR 0.72	
MDER 0.66	


Optical	
opal (lambertsch)	
PstLM ≤ 1.0 ³	
SVM ≤ 0.4 ³	

Cylindrical, decorative-graphic light inset made of aluminium and satinised PMMA for homogeneous illumination; surface anodised black; light inset can be installed and moved without tools by means of magnetic holders+locking; suitable for two MOVE IT 25 / 45 profiles as well as one MOVE IT 25 / 45 profile (axial arrangement); holders 360° rotatable; power supplied via MOVE IT system track profile; hot plug protection; passive cooling of the LEDs through improved heat sink geometry; with CSP (Chip-Scale-Packaging) technology for maximum efficiency; light colour: tunable white diodes (1800-4000 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC3; 48 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional;

Light distribution



Product drawing



Electrical	
DALI-2 DT8	
48 V	
fixture 13.2 W	
optical inset 9.3 W	
PC3	
1 DALI Addr.	
9 W/m	

Physical	
length 1510 mm	
width 33 mm	
height 33 mm	
0.55 kg	

¹ RAL code
² OPTICAL INSET: incl. consideration of optical losses
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

