


MOUNTING HOUSING

300 trimless linear

049-8843038




| | |
|----------------|--|
| Project / Type | |
| Notes | |
| Count / Date | |

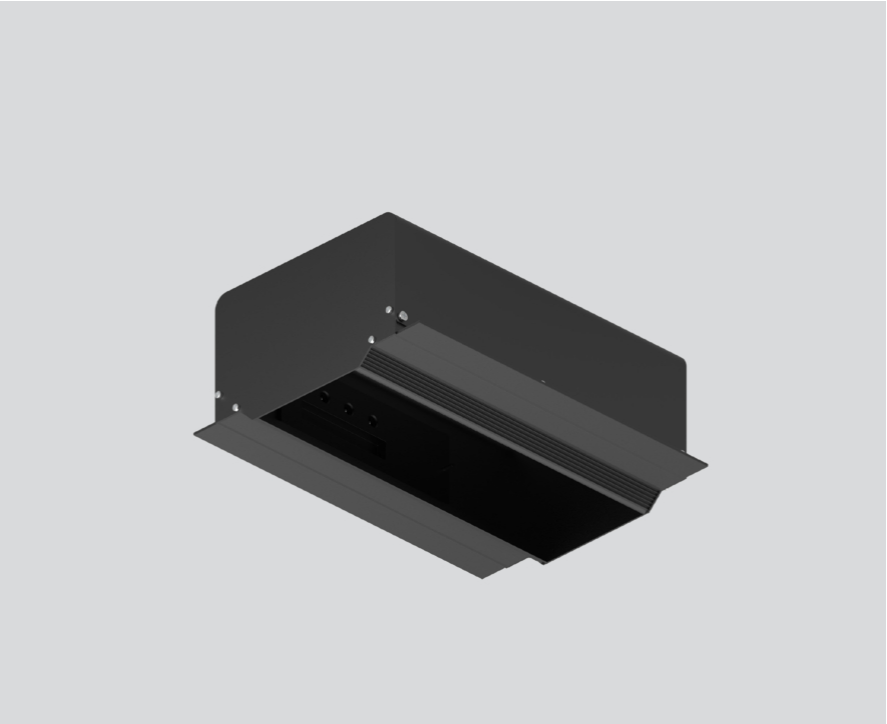

Installation housing in pressed steel sheet with rectangular cut-out; for trimless installation in plasterboard ceilings; special edge design with perforations for better adhesion of filler; suitable for ceiling thickness of 12.5 mm; 3 non-reversible plug and play connector sockets for power supply to the spotlights; spotlight can be installed and moved without tools by means of magnetic holders; hot plug protection; surface jet black powder coated; degree of protection IP20; PC1; incl. DALI-2 converter; all spotlights together DALI dimmable; control gear replaceable by an authorized professional;

Product drawing



General

| | |
|-----------------------------------|--|
| Ceiling , Recessed | |
| jet black , RAL 9005 ¹ | |
| IP20 | |

Electrical

| | |
|---|--|
| DALI-2 | |
| 220-240 V | |
| PC1 | |
| 1 DALI Addr. | |
| PC2 | |
| 25 W | |
| Dim DALI, Push Dim, Dim DSI, Dim Dali 2 | |
| min 198 V | |
| max 264 V | |
| Constant Current | |
| min 50 Hz | |
| max 60 Hz | |

Physical

| | |
|---------------|--|
| length 308 mm | |
| width 252 mm | |
| height 120 mm | |

Cutout

| | |
|--------------------------------|--|
| length 308 mm | |
| width 136 mm | |
| min. ceiling thickness 12.5 mm | |
| max. ceiling thickness 12.5 mm | |
| recessed depth 175 mm | |

¹ RAL code

Installation instructions





Project / Type

Notes

Count / Date

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Converters |
|--------------------------------|----------------------|
| B10 | 19 |
| B13 | 24 |
| B16 | 31 |
| B20 | 40 |
| C10 | 31 |
| C13 | 40 |
| C16 | 51 |
| C20 | 66 |