


MOUNTING HOUSING

with glowing square

049-8833537




Project / Type	
Notes	
Count / Date	

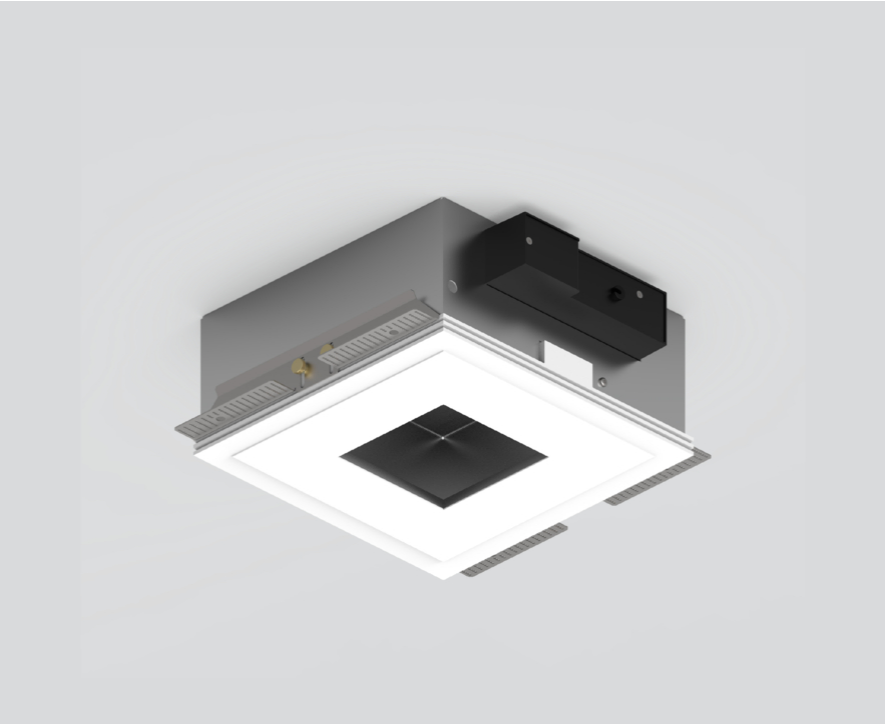

Recessed housing made of pressed steel sheet for flush installation in plasterboard ceilings, underside of aluminium-reinforced plaster (paintable); with square cut-out; no break-out of edges; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 8-25 mm; 3 non-reversible plug and play connector sockets for power supply to the spotlights; spotlight can be installed and moved without tools by means of magnetic holders; hot plug protection; indirect light component in housing; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; indirect component in the channel continuously adjustable dimming via DALI; surface traffic white powder coated; degree of protection IP20; PC1; incl. DALI-2 converter; all spotlights together DALI dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Product drawing



General

Ceiling , Recessed
traffic white , RAL 9016 ¹
IP20

LED

3000 K
CRI ≥ 90
initial MacAdam ≤ 3 SDCM
R _g : 101 , R _r : 91 , R ₍₁₋₁₅₎ : 89
MR 0.56
MDER 0.51

Electrical

DALI-2
220-240 V
PC1
1 DALI Addr.

Physical

length 260 mm
width 260 mm
height 120 mm
5 kg

Cutout

length 270 mm
width 270 mm
min. ceiling thickness 8 mm
max. ceiling thickness 25 mm
recessed depth 140 mm

¹ RAL code

Installation instructions



MOUNTING HOUSING

with glowing square

049-8833537



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.93	0.89	0.86	0.83
LSF	1	1	1	1	1

MF

MF

LMF^a

LMF × RSMF × LLMF × LSF

Maintenance Factor

Luminaire Maintenance Factor

RSMF^a

LLMF

LSF

Room Surface Maintenance Factor

Lamp Lumens Maintenance Factor

Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.