


MOUNTING HOUSING

with glowing round

049-8823537




Project / Type	
Notes	
Count / Date	

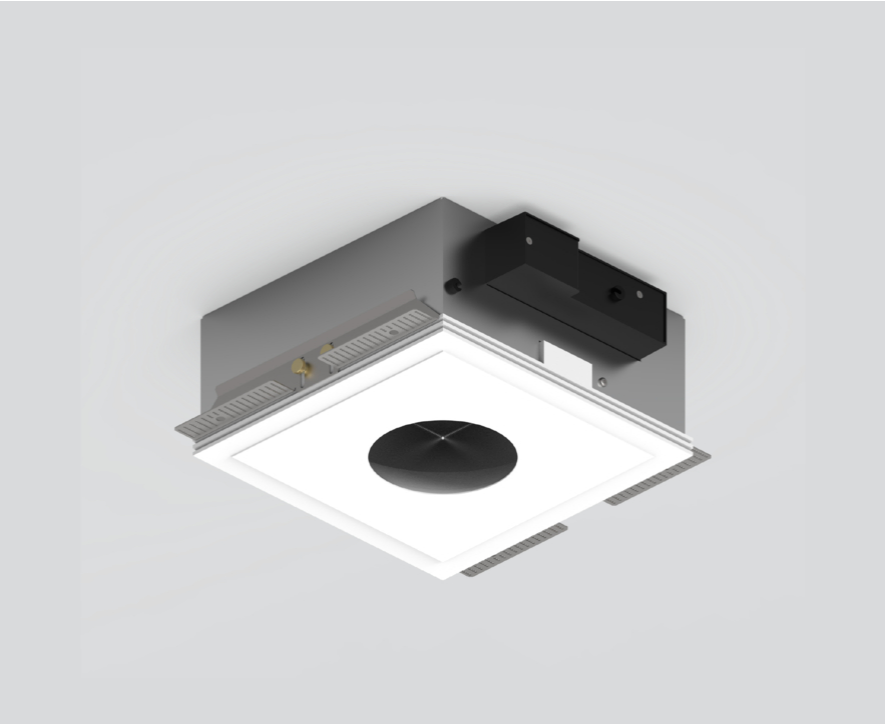

Recessed housing made of pressed steel sheet for flush installation in plasterboard ceilings, underside of aluminium-reinforced plaster (paintable); with round cut-out; no break-out of edges; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 8-25 mm; 3 non-reversible plug and play connector sockets for power supply to the spotlights; spotlight can be installed and moved without tools by means of magnetic holders; hot plug protection; indirect light component in housing; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; indirect component in the channel continuously adjustable dimming via DALI; surface traffic white powder coated; degree of protection IP20; PC1 220-240V; incl. DALI-2 converter; all spotlights together DALI dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Product drawing



General

Ceiling , Recessed
traffic white , RAL 9016 ¹
IP20

LED

3000 K
CRI ≥ 90
initial MacAdam ≤ 3 SDCM
R _g : 101 , R _r : 91 , R ₍₁₋₁₅₎ : 89
MR 0.56
MDER 0.51

Electrical

DALI-2
PC1 220-240V
1 DALI Addr.

Physical

length 260 mm
width 260 mm
height 120 mm

Cutout

length 270 mm
width 270 mm
min. ceiling thickness 8 mm
max. ceiling thickness 25 mm
recessed depth 140 mm

¹ RAL code

Installation instructions

