

MOUNTING HOUSING

square


049-8813037



Project / Type _____

Notes _____

Count / Date _____

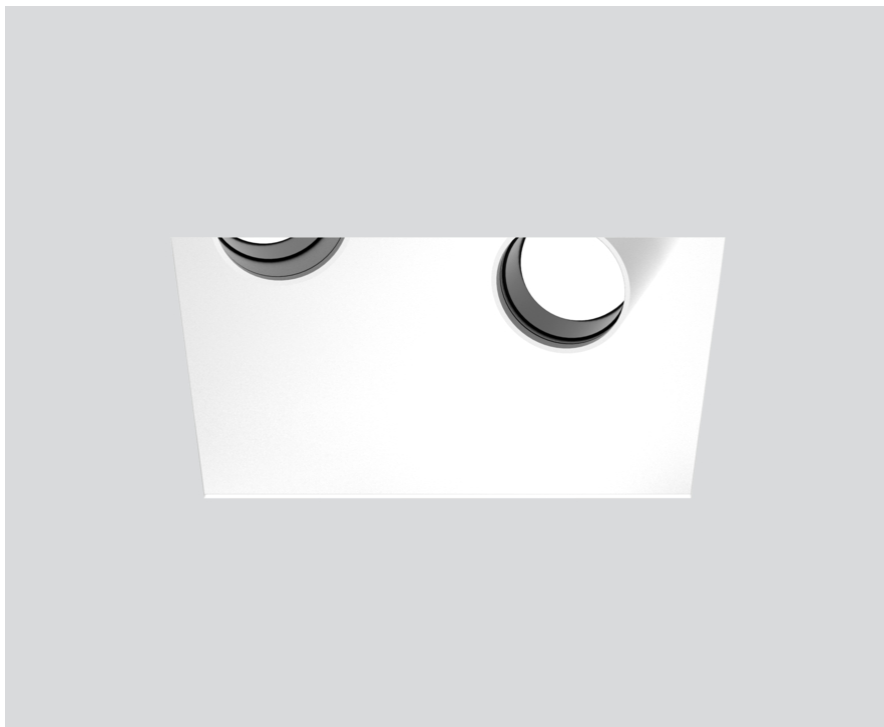

General

Ceiling , Recessed _____

traffic white , RAL 9016 ¹ _____

IP20 _____

Electrical

DALI-2 _____

PC1 220-240V _____

1 DALI Addr. _____

Physical

length 260 mm _____

width 260 mm _____

height 120 mm _____

Cutout

length 270 mm _____

width 270 mm _____

min. ceiling thickness 8 mm _____

max. ceiling thickness 25 mm _____

recessed depth 140 mm _____

Recessed housing made of pressed steel sheet for flush installation in plasterboard ceilings, underside of aluminium-reinforced plaster (paintable); with square cut-out; no break-out of edges; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 8-25 mm; 3 non-reversible plug and play connector sockets for power supply to the spotlights; spotlight can be installed and moved without tools by means of magnetic holders; hot plug protection; surface traffic white powder coated; degree of protection IP20; PC1 220-240V; incl. DALI-2 converter; all spotlights together DALI dimmable; control gear replaceable by an authorized professional;

¹ RAL code

Installation instructions



Product drawing

