

# MOUNTING HOUSING

## square


049-8813037



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

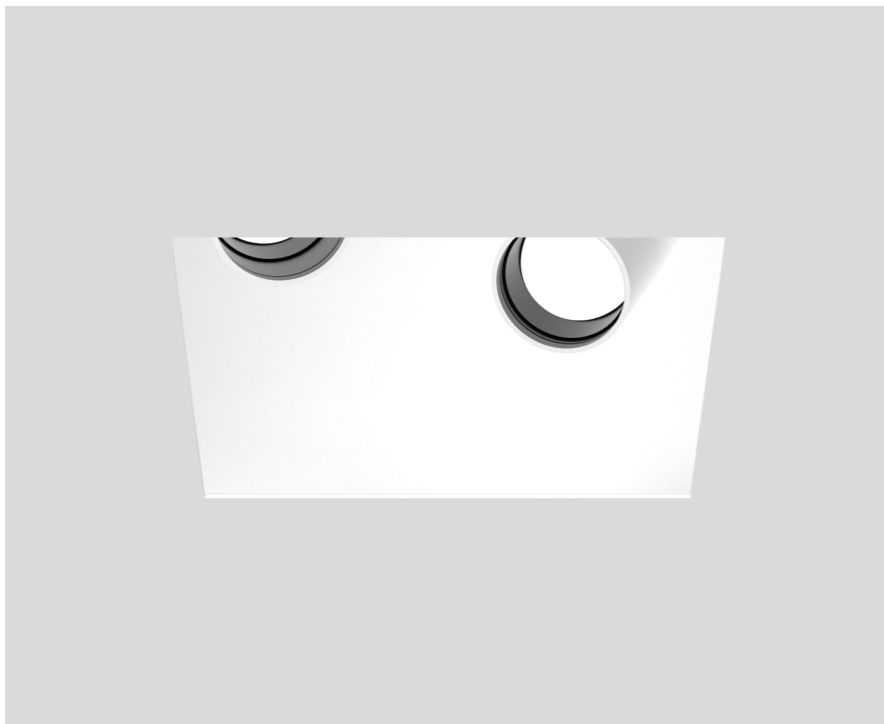

### General

Ceiling , Recessed \_\_\_\_\_  
traffic white , RAL 9016 <sup>1</sup> \_\_\_\_\_  
IP20 \_\_\_\_\_

### Electrical

DALI-2 \_\_\_\_\_  
PC1 220-240V \_\_\_\_\_  
1 DALI Addr. \_\_\_\_\_

### Physical

length 260 mm \_\_\_\_\_  
width 260 mm \_\_\_\_\_  
height 120 mm \_\_\_\_\_  
4.8 kg \_\_\_\_\_

### Cutout

length 270 mm \_\_\_\_\_  
width 270 mm \_\_\_\_\_  
min. ceiling thickness 8 mm \_\_\_\_\_  
max. ceiling thickness 25 mm \_\_\_\_\_  
recessed depth 140 mm \_\_\_\_\_

Recessed housing made of pressed steel sheet for flush installation in plasterboard ceilings, underside of aluminium-reinforced plaster (paintable); with square cut-out; no break-out of edges; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 8-25 mm; 3 non-reversible plug and play connector sockets for power supply to the spotlights; spotlight can be installed and moved without tools by means of magnetic holders; hot plug protection; surface traffic white powder coated; degree of protection IP20; PC1 220-240V; incl. DALI-2 converter; all spotlights together DALI dimmable; control gear replaceable by an authorized professional;

<sup>1</sup> RAL code

### Installation instructions



### Product drawing

