

JUST 45 MOVE IT 25 / 25 S / 45



050-0131537V



Project / Type _____

Notes _____

Count / Date _____

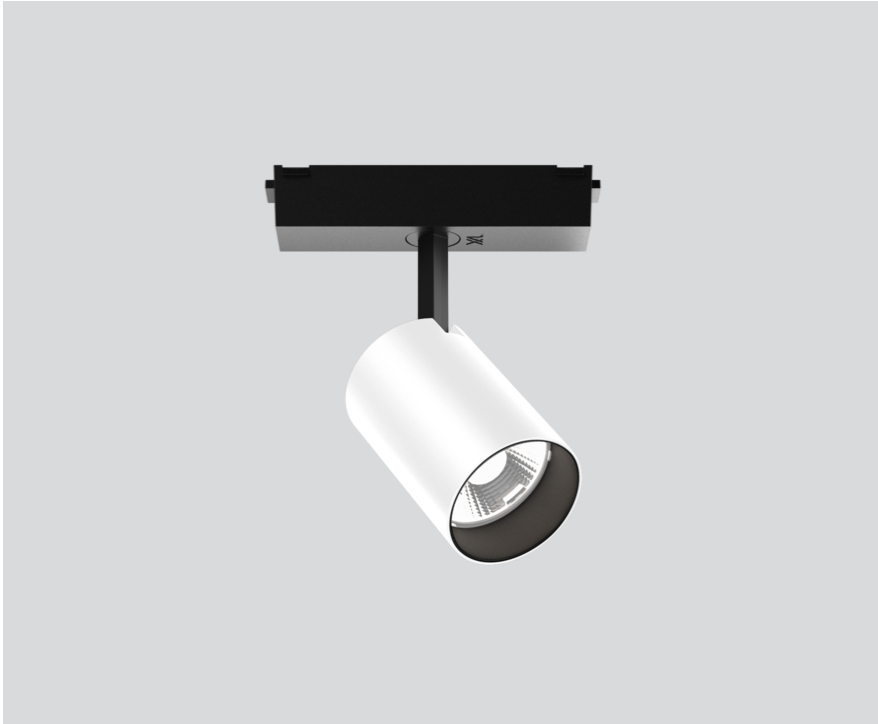

General

Ceiling , Track _____
 tilt max 90° _____
 rotation 360° _____
 white , RAL9016 ¹ _____
 IP20 _____
 258 lm _____

LED

3000 K _____
 CRI ≥ 90 _____
 L85 / 50000 h _____
 initial MacAdam ≤ 3 SDCM _____
 R_g: 98 , R_f: 91 , R₍₁₋₁₅₎: 89 _____
 MR 0.6 _____
 MDER 0.55 _____

Optical

super spot _____
 beam angle 8° _____

Electrical


DALI-2 single control _____
 6.0 W _____
 PC3 48V _____
 43 lm/W² _____
 1 DALI Addr. _____

Physical

diameter 45 mm _____
 height 68 mm _____
 0.2 kg _____

Cylindrical spotlight in aluminium; surface white powder coated; 360° rotatable and 90° tiltable; spotlight can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; passive cooling of the LEDs through improved heat sink geometry; with high power LED for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 8° beam; degree of protection IP20; PC3 48V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); optical attachment available as accessory; accessories are listed separately; light source not replaceable;


Light distribution



super spot 8°

h (m)	E0° (lx)	ø (m)
1	9020	0.14
2	2250	0.28
3	1000	0.41
4	560	0.55
5	360	0.69

Product drawing



¹ RAL code

² incl. optical losses and the efficiency of the operating device (converter)

**Installation
instructions**



**Lighting
calculator**



JUST 45 MOVE IT 25 / 25

S / 45

050-0131537V



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.95	0.92	0.89	0.86
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF RSMF^a Room Surface Maintenance Factor
MF Maintenance Factor LLMF Lamp Lumens Maintenance Factor
LMF^a Luminaire Maintenance Factor LSF Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Optical accessories

HONEYCOMB LOUVER

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
jet black	42	007-1965188

