

JUST 45 MOVE IT 25 / 25 S / 45


050-0131L3XM



Project / Type _____


Notes _____

Count / Date _____

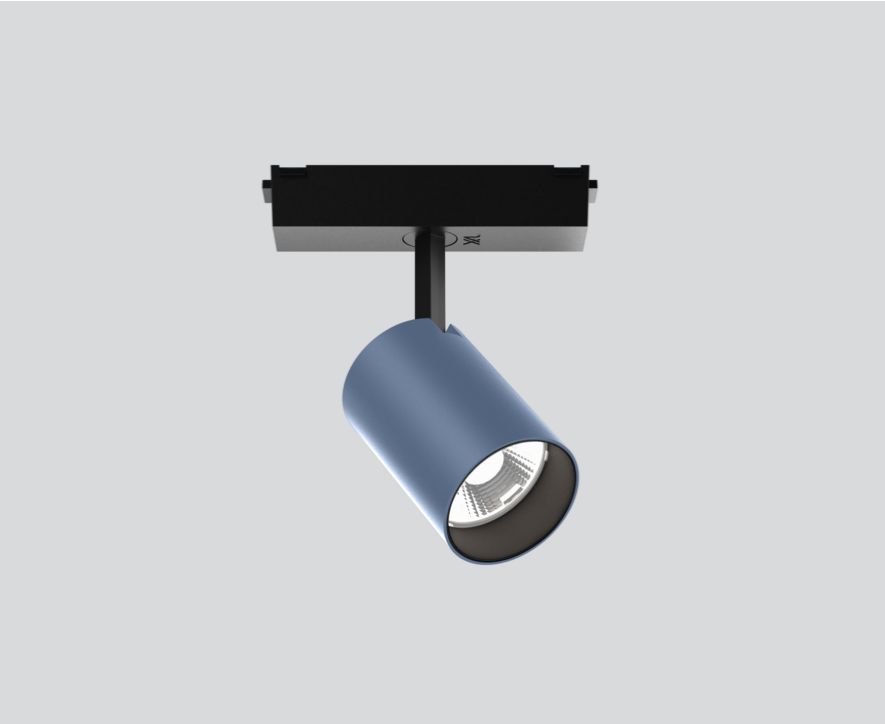

Cylindrical spotlight in aluminium; surface special colours powder coated; 360° rotatable and 90° tiltable; spotlight can be installed and moved without tools by means of magnetic holders+locking; power supplied via MOVE IT system track profile; hot plug protection; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour: tunable white diodes (1800-3000 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 92 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 21° beam; degree of protection IP20; PC3 48V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); optical attachment available as accessory; accessories are listed separately; light source not replaceable;


Light distribution



medium 21°

h (m)	EO° (lx)	ø (m)
1	2300	0.38
2	570	0.76
3	260	1.14
4	140	1.52
5	90	1.90

Product drawing



General

Ceiling / Wall , Track _____

tilt max 90° _____

rotation 360° _____

special colours _____

IP20 _____

448 lm _____

LED

tunable white _____

1800 K - 3000 K _____

CRI ≥ 92 _____

L90 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

R_g: 101, R_r: 94, R_{1-15}: 96 _____

MR 0.64 _____

MDER 0.58 _____

Optical

medium _____

beam angle 21° _____

Electrical

DALI-2 DT8 single control _____

11.3 W _____

PC3 48V _____

40 lm/W _____

1 DALI Addr. _____

Physical

diameter 45 mm _____

height 68 mm _____

0.2 kg _____

Installation instructions

