

TULA micro suspended

canopy trimless


049-571551XM 005-3511017 002-90733



Project / Type

Notes

Count / Date

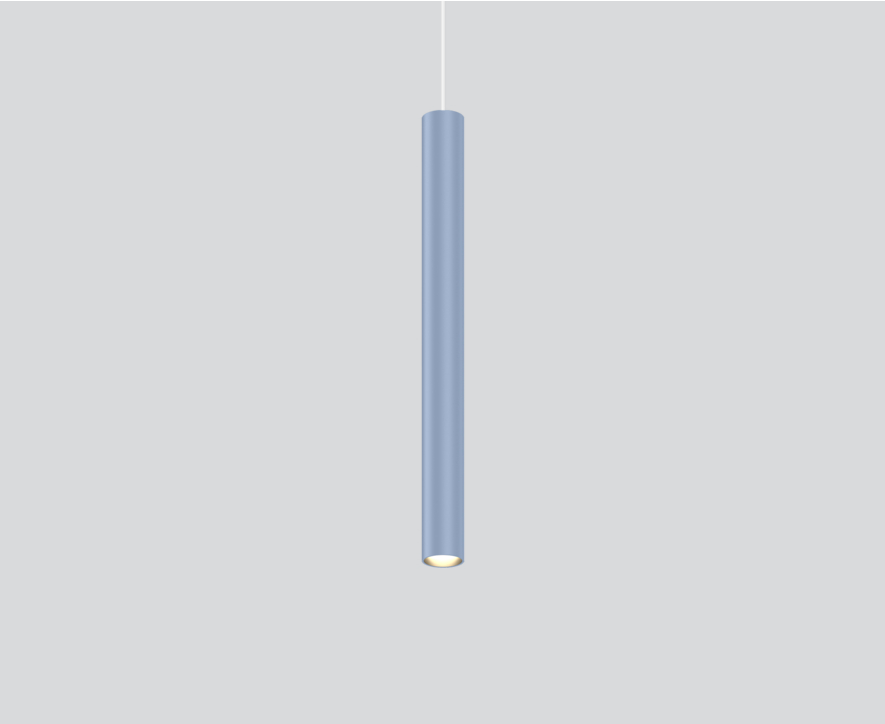

General

Ceiling , Suspended
special colours
Canopy traffic white
IP20
746 lm

LED

3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
 $R_g: 100, R_f: 90, R_{f(1-15)}: 87$
MR 0.59
MDER 0.54

Optical

medium
beam angle 25°
 $P_{stLM} \leq 1.0^1$
 $SVM \leq 0.4^1$

Electrical

DALI-2
system 11.3 W
inset 8.4 W
500 mA
PC2 220-240V
system 66 lm/W²
inset 88 lm/W³


Physical

diameter 47 mm
height 500 mm
0.74 kg

Cutout

diameter 65 mm
min. ceiling thickness 9 mm
max. ceiling thickness 25 mm
recessed depth 130 mm


Light distribution



medium 25°

h (m)	EO° (lx)	ø (m)
1	3230	0.44
2	810	0.89
3	360	1.33
4	200	1.78
5	130	2.22

Product drawing



¹ Value of containing product at full load (undimmed)
² incl. optical losses and the efficiency of the operating device (converter)
³ incl. optical losses

Installation instructions



Lighting calculator

