

# BO 45 base surface 1 lamp


049-6330437V



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

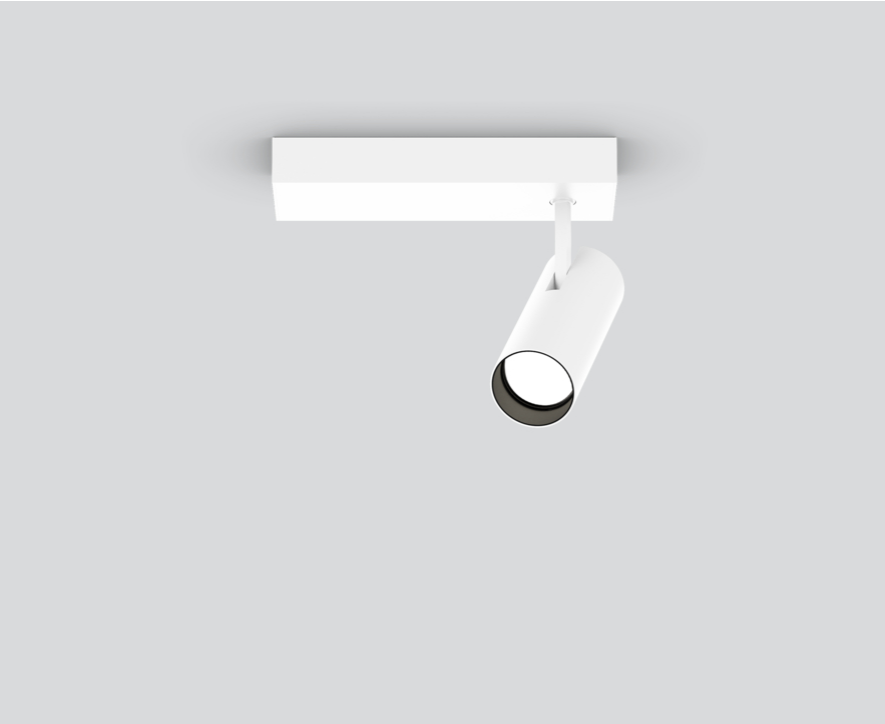

## General

Ceiling , Track \_\_\_\_\_

tilt max 90° \_\_\_\_\_

rotation 350° \_\_\_\_\_

white , RAL 9016 <sup>1</sup> \_\_\_\_\_

IP20 \_\_\_\_\_

406 lm \_\_\_\_\_

## LED

2700 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L85 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 3 SDCM \_\_\_\_\_

R<sub>g</sub>: 99 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 89 \_\_\_\_\_

MR 0.54 \_\_\_\_\_

MDER 0.49 \_\_\_\_\_

## Optical

super spot \_\_\_\_\_

beam angle 8° \_\_\_\_\_

PstLM ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

Surface mounted spotlight made of aluminium; 1 lamp; cylindrical spotlight head; surface white powder coated; 350° rotatable and 90° tiltable; surface mounted housing in aluminium incl. converter; mounting plate with pre-assembled converter unit can be pre-mounted; luminaire housing can be attached without tools by interlock; passive cooling of the LEDs through improved heat sink geometry; with high power LED for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 8° beam; good glare control through recessed light point level; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC1; 220-240 V; incl. DALI-2 converter; flicker-free visual comfort through analogue current control (minimum value 1%); luminaire for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Electrical

DALI-2 \_\_\_\_\_

220-240 V \_\_\_\_\_

system 9.2 W \_\_\_\_\_

system 44 lm/W<sup>3</sup> \_\_\_\_\_

PC1 \_\_\_\_\_

1 DALI Addr. \_\_\_\_\_

## Physical


length 180 mm \_\_\_\_\_

width 55 mm \_\_\_\_\_

height 163 mm \_\_\_\_\_

0.5 kg \_\_\_\_\_


## Light distribution



super spot 8°

h (m)	EO° (lx)	ø (m)
1	14200	0.14
2	3500	0.28
3	1600	0.41
4	900	0.55
5	600	0.69

## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions



## Lighting calculator

