

TULA nano suspended

canopy trim

049-5710418M 005-3521018 002-90732



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Suspended _____

black , RAL9005 ¹ _____

Canopy jet black _____

IP20 _____

699 lm _____

LED

2700 K _____

CRI ≥ 90 _____

initial MacAdam ≤ 3 SDCM _____

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89 _____

MR 0.53 _____

MDER 0.48 _____

Optical

medium _____

beam angle 25° _____

PstLM ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrical

non DIM _____

system 12.0 W _____

inset 9.0 W _____

18 Vf _____

500 mA _____

PC2 220-240V _____

system 58 lm/W³ _____

inset 78 lm/W⁴ _____

Physical

diameter 26 mm _____

height 500 mm _____

0.42 kg _____

Cutout

diameter 65 mm _____

min. ceiling thickness 2 mm _____

max. ceiling thickness 25 mm _____

recessed depth 70 mm _____


Light distribution



medium 25°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 2620 | 0.44 |
| 2 | 660 | 0.89 |
| 3 | 290 | 1.33 |
| 4 | 160 | 1.77 |
| 5 | 100 | 2.22 |

Product drawing

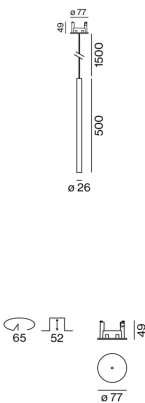

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Installation instructions



Lighting calculator

