

# BO 55 surface


049-624051XM 002-90726



Project / Type

Notes

Count / Date

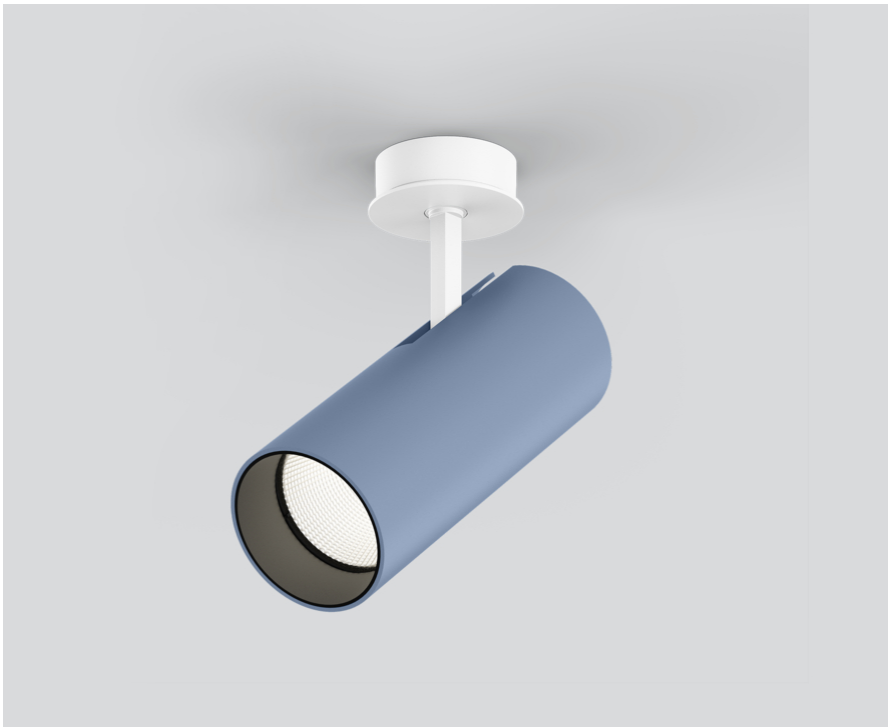

General

Ceiling , Surface

tilt max 90°

rotation 350°

special colours

IP20

1900 lm

fixture 90 lm/W<sup>1</sup>

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>f(1-5)</sub>: 88

MR 0.59

MDER 0.53

Optical

medium

beam angle 31°

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

Electrical

non DIM

220-240 V

system 24.7 W

fixture 21.0 W

36 Vf

600 mA

PC2

Physical

diameter 55 mm


height 165 mm

0.55 kg

<sup>1</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.  
<sup>2</sup> Value of containing product at full load (undimmed)


Cylindrical spotlight in aluminium; surface special colours powder coated; 350° rotatable and 90° tiltable; with surface mounted housing; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high quality, aluminium, vapour deposition coated reflector with faceted lens design; precise radiation characteristic with 31° beam; good glare control through recessed light point level; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC2; 220-240 V; incl. converter, non dimmable; external converter for ceiling insertion, through-wiring suitable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



| medium 31° |          |       |
|------------|----------|-------|
| h (m)      | E0° (lx) | ø (m) |
| 1          | 6860     | 0.55  |
| 2          | 1710     | 1.10  |
| 3          | 760      | 1.65  |
| 4          | 430      | 2.20  |
| 5          | 270      | 2.75  |

## Product drawing



Installation instructions

Lighting calculator

