

TULA nano suspended

canopy surface


049-5710414M 005-2602198



Project / Type _____

Notes _____

Count / Date _____

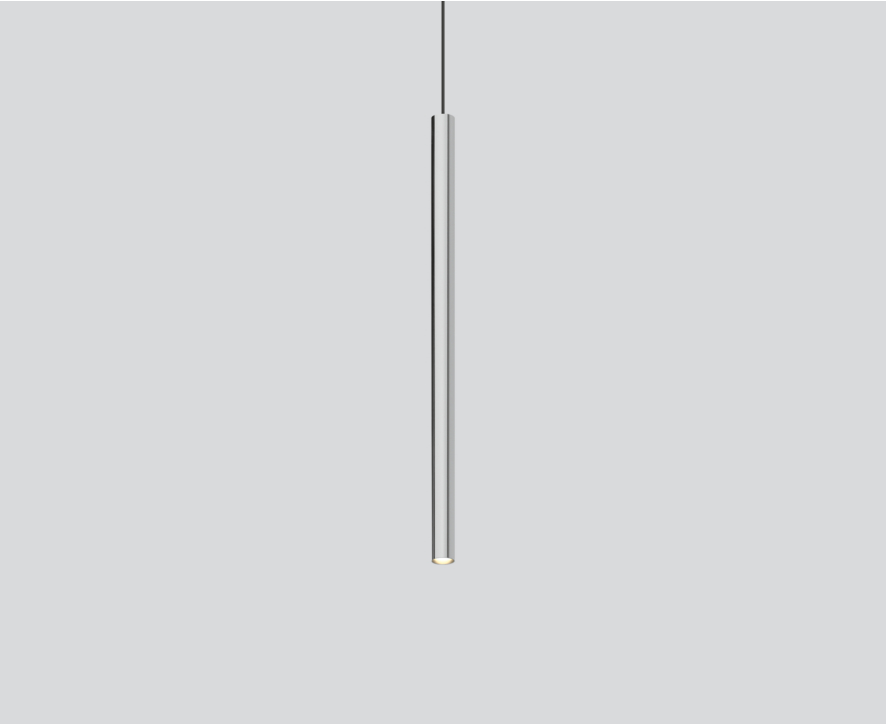

General

Ceiling , Suspended _____

chrome _____

Canopy jet black _____

IP20 _____

699 lm _____

LED

2700 K _____

CRI ≥ 90 _____

initial MacAdam ≤ 3 SDCM _____

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89 _____

MR 0.53 _____

MDER 0.48 _____

Optical

medium _____

beam angle 25° _____

Electrical

Casambi _____

system 12.0 W _____

inset 9.0 W _____

18 Vf _____

500 mA _____

PC2 220-240V _____

system 58 lm/W¹ _____

inset 78 lm/W² _____


Physical

diameter 26 mm _____

height 500 mm _____

0.25 kg _____

Light distribution



medium 25°

h (m)	EO° (lx)	ø (m)
1	2620	0.44
2	660	0.89
3	290	1.33
4	160	1.77
5	100	2.22

Product drawing



¹ incl. optical losses and the efficiency of the operating device (converter)

² incl. optical losses

Installation instructions



Lighting calculator

