

TULA nano suspended

canopy trim


049-5510514M 005-3521018 002-90732



Project / Type

Notes

Count / Date

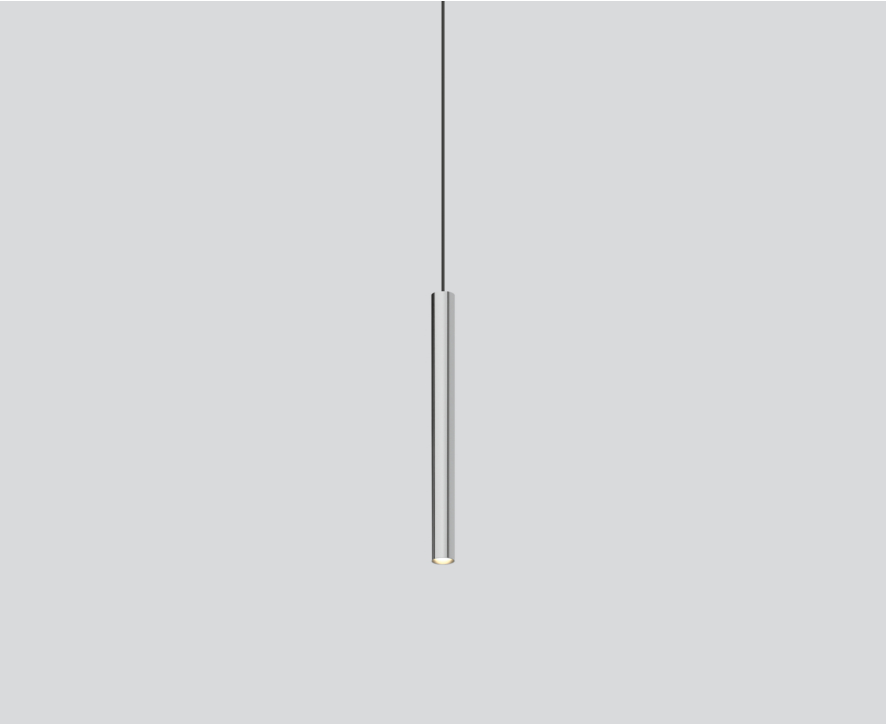

General

Ceiling , Suspended

chrome

Canopy jet black

IP20

744 lm

LED

3000 K

CRI ≥ 90

initial MacAdam ≤ 3 SDCM

R_g: 100 , R_f: 91 , R_{f(1-15)}: 88

MR 0.59

MDER 0.53

Optical

medium

beam angle 25°

PstLM ≤ 1.0¹

SVM ≤ 0.4¹

Electrical

non DIM

system 12.1 W

inset 9.1 W

18 Vf

500 mA

PC2 220-240V

system 61 lm/W²

inset 82 lm/W³

Physical

diameter 26 mm

height 300 mm

0.32 kg

Cutout

diameter 65 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 70 mm

¹ Value of containing product at full load (undimmed)
² incl. optical losses and the efficiency of the operating device (converter)
³ incl. optical losses


Light distribution



medium 25°

h (m)	E0° (lx)	ø (m)
1	2790	0.44
2	700	0.89
3	310	1.33
4	170	1.77
5	110	2.22

Product drawing

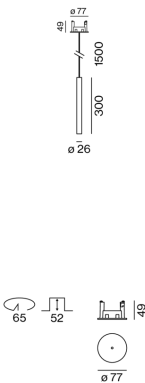

Installation instructions



Lighting calculator

