


ARY adjustable rod suspended

canopy trimless

049-523161XM 005-3511017 002-90732



Project / Type _____
 Notes _____
 Count / Date _____

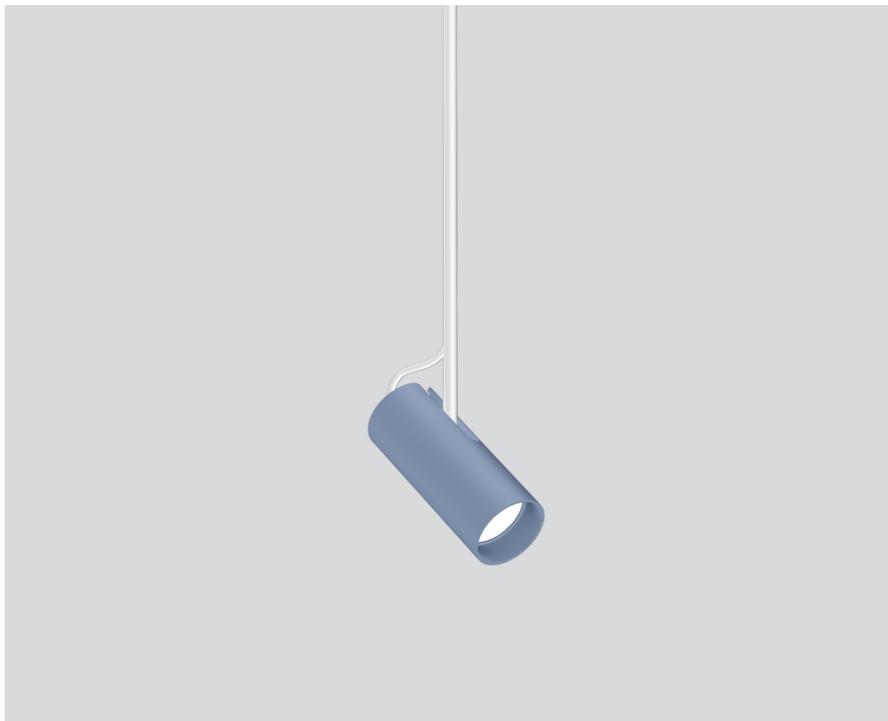

General

Ceiling , Suspended _____
 tilt max 90° _____
 rotation 265° _____
 special colours _____
 Canopy traffic white _____
 IP20 _____
 739 lm _____

LED

4000 K _____
 CRI ≥ 90 _____
 L90 / 50000 h _____
 initial MacAdam ≤ 3 SDCM _____
 R_g: 99 , R_r: 89 , R_{t(1-5)}: 87 _____
 MR 0.81 _____
 MDER 0.73 _____

Optical


medium _____
 beam angle 25° _____
 P_{stLM} ≤ 1.0¹ _____
 SVM ≤ 0.4¹ _____

Electrical

non DIM _____
 system 11.2 W _____
 inset 8.4 W _____
 18 Vf _____
 500 mA _____
 PC2 220-240V _____
 system 66 lm/W² _____
 inset 88 lm/W³ _____

Decorative suspended luminaire in aluminium; surface special colours powder coated; height adjustable U-profile pendant rod suspension (special colours) 1500mm, feed 2000mm (1500mm in U-profile), incl. ceiling mounting ring + hook (special colours) for multiple positioning of the luminaire in the room; spotlight head 265° rotatable and 90° tiltable; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; good glare control through recessed light point level; incl. high quality lens system; precise radiation characteristic with 25° beam; degree of protection IP20; PC2 220-240V; canopy for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 9-25 mm; special mounting tool for easy installation of the trimless housing available as an accessory; incl. converter, non dimmable; external converter for ceiling insertion; light source not replaceable; control gear replaceable by an authorized professional;


Light distribution



medium 25°

h (m)	E0° (lx)	ø (m)
1	3200	0.44
2	800	0.89
3	360	1.33
4	200	1.78
5	130	2.22

Product drawing



Physical

rod 1500 mm with hook _____
 diameter 47 mm _____
 height 110 mm _____
 0.64 kg _____

Cutout

diameter 65 mm _____
 min. ceiling thickness 9 mm _____
 max. ceiling thickness 25 mm _____
 recessed depth 70 mm _____

¹ Value of containing product at full load (undimmed)
² incl. optical losses and the efficiency of the operating device (converter)
³ incl. optical losses

Installation instructions



Lighting calculator



ARY adjustable rod suspended

canopy trimless

049-523161XM 005-3511017 002-90732



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.97	0.96	0.95	0.93	0.92
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	57
B13	75
B16	92
B20	115
C10	57
C13	75
C16	92
C20	115

Components

MOUNTING SET trimless

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
traffic white	75	005-3511017



POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
10 W	65-39-20	002-90732



Mounting accessories

RING CEILING MOUNTED

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
traffic white	50	050-0510217
jet black	50	050-0510218



Optional electrical accessories

DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2 200-1050 mA 2 x 42W	36-88-59	005-6121030



Other accessories

SPECIAL MOUNTING TOOL

TYPE	Ø (MM)	ARTICLE NUMBER(S)
necessary to install mounting housing trimless	100	063-8912110



[049-523161XM 005-3511017 002-90732] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

21.11.2024

2 / 3

ARY adjustable rod suspended

canopy trimless

049-523161XM 005-3511017 002-90732



Project / Type

Notes

Count / Date

Optical accessories

OVAL LENS

Ø (MM)
42

ARTICLE NUMBER(S)
007-1965880



SOFT LENS

Ø (MM)
42

ARTICLE NUMBER(S)
007-1965980



WALLWASHER LENS

Ø (MM)
42

ARTICLE NUMBER(S)
007-1965780

