

# TULA nano suspended

canopy trim

049-5510518M 005-3521018 002-90733



Project / Type

Notes

Count / Date



### General

Ceiling , Suspended

black , RAL9005 <sup>1</sup>

Canopy jet black

IP20

744 lm

### LED

3000 K

CRI ≥ 90

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>f(1-5)</sub>: 88

MR 0.59

MDER 0.53

### Optical

medium

beam angle 25°

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2

system 12.1 W

inset 9.1 W

18 Vf

500 mA

PC2 220-240V

system 61 lm/W<sup>3</sup>

inset 82 lm/W<sup>4</sup>

### Physical

diameter 26 mm

height 300 mm

0.35 kg

### Cutout

diameter 65 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 130 mm


### Light distribution



medium 25°

h (m)	E0° (lx)	ø (m)
1	2790	0.44
2	700	0.89
3	310	1.33
4	170	1.77
5	110	2.22

### Product drawing

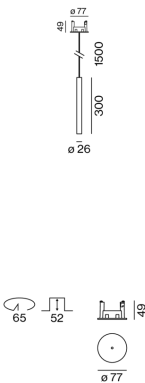

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses

### Installation instructions



### Lighting calculator

