

TULA nano suspended

canopy trim

049-5510517M 005-3521017 002-90733



Project / Type

Notes

Count / Date



General

Ceiling , Suspended

white , RAL 9016 ¹

Canopy traffic white

IP20

744 lm

fixture 82 lm/W²

LED

3000 K

CRI ≥ 90

initial MacAdam ≤ 3 SDCM

R_g: 100 , R_f: 91 , R₍₁₋₁₅₎: 88

MR 0.59

MDER 0.53

Optical

medium

beam angle 25°

PstLM ≤ 1.0 ³

SVM ≤ 0.4 ³

Electrical

DALI-2

220-240 V

system 12.1 W

fixture 9.1 W

18 Vf

500 mA

PC2

Physical

diameter 26 mm

height 300 mm

0.35 kg

Cutout


diameter 65 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 130 mm


Light distribution



medium 25°

h (m)	E0° (lx)	ø (m)
1	2790	0.44
2	700	0.89
3	310	1.33
4	170	1.77
5	110	2.22

Product drawing

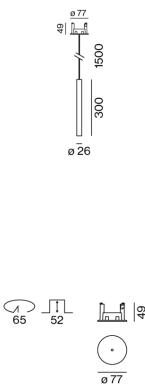

¹ RAL code

² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

