

ARY cable suspended

canopy trim

049-5211617M 005-3521017 002-90733



Project / Type
Notes
Count / Date



General

Ceiling , Suspended
white , RAL 9016 ¹
Canopy traffic white
IP20
739 lm
fixture 88 lm/W ²

LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _f : 89 , R _{t(1-15)} : 87
MR 0.81
MDER 0.73

Optical

medium
beam angle 25°
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Electrical

DALI-2
220-240 V
system 11.2 W
fixture 8.4 W
18 Vf
500 mA
PC2
1 DALI Addr.

Physical

suspension 2000 mm with hook
diameter 47 mm
height 110 mm
0.6 kg

Cutout

diameter 65 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 130 mm

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)


Light distribution



medium 25°

h (m)	E0° (lx)	ø (m)
1	3200	0.44
2	800	0.89
3	360	1.33
4	200	1.78
5	130	2.22

Product drawing

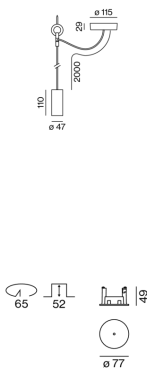

Installation instructions



Lighting calculator



[049-5211617M 005-3521017 002-90733] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com