

ARY cable suspended

canopy trim

049-5211417F 005-3521017 002-90733



Project / Type
Notes
Count / Date



General

Ceiling , Suspended
white , RAL 9016 ¹
Canopy traffic white
IP20
688 lm
fixture 82 lm/W ²

LED

2700 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _f : 91 , R ₍₁₋₁₅₎ : 89
MR 0.54
MDER 0.49

Optical

flood
beam angle 44°
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Electrical

DALI-2
220-240 V
system 11.2 W
fixture 8.4 W
18 Vf
500 mA
PC2
1 DALI Addr.

Physical


suspension 2000 mm with hook
diameter 47 mm
height 110 mm
0.6 kg

Cutout

diameter 65 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 130 mm

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)


Light distribution



flood 44°

h (m)	E0° (lx)	ø (m)
1	1280	0.82
2	320	1.64
3	140	2.45
4	80	3.27
5	50	4.09

Product drawing

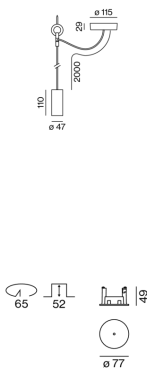

Installation instructions



Lighting calculator

