

SASSO 40 round wallwasher

trimless

048-2840517A 048-2896117 002-90743



Project / Type

Notes

Count / Date




General
Ceiling , Recessed
rotation 360°
white , RAL9016 ¹
Mounting set traffic white
IP20
598 lm

LED
3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 97 , R _f : 91 , R _{1-15} : 89
MR 0.6
MDER 0.54


Optical
wallwasher
beam angle 118°
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Round recessed spotlight in die-cast aluminium; surface white; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

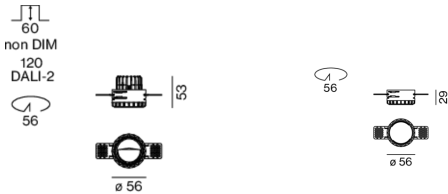

Electrical
DALI-2
9.0 W
inset 6.8 W
27 Vf
250 mA
PC2 220-240V
66 lm/W
inset 88 lm/W

Physical
trimless
diameter 56 mm
height 55 mm
0.34 kg

Cutout
diameter 56 mm
recessed depth 120 mm

¹ RAL code ² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

