

SASSO 40 round wallwasher

trim

048-2840414A 048-2896317 002-90742



Project / Type

Notes

Count / Date



General

Ceiling , Recessed
 rotation 360°
 matt silver
 Mounting set traffic white
 IP20
 554 lm

LED

2700 K
 CRI ≥ 90
 L80 / 50000 h
 initial MacAdam ≤ 3 SDCM
 R_g: 97 , R_f: 91 , R₍₁₋₁₅₎: 90
 MR 0.53
 MDER 0.48

Optical

wallwasher
 beam angle 118°
 PstLM ≤ 1.0¹
 SVM ≤ 0.4¹

Electrical

non DIM
 9.0 W
 inset 6.8 W
 27 Vf
 250 mA
 PC2 220-240V
 62 lm/W
 inset 82 lm/W

Physical


trim
 diameter 60 mm
 height 55 mm
 0.18 kg

Cutout


diameter 56 mm
 min. ceiling thickness 2 mm
 max. ceiling thickness 25 mm
 recessed depth 60 mm

¹ Value of containing product at full load (undimmed)

Light distribution



Product drawing

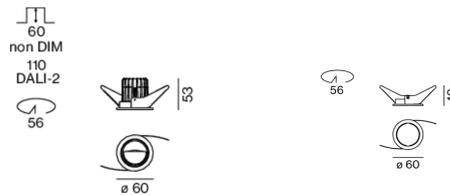

Installation instructions



Lighting calculator



SASSO 40 round wallwasher

trim

048-2840414A 048-2896317 002-90742



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.92	0.89	0.85	0.82
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	57
B13	75
B16	92
B20	115
C10	57
C13	75
C16	92
C20	115

Components

MOUNTING SET with trim 1 lamp

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
for intermediate ceilings	traffic white	60	048-2896317



POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
10 W	65-39-20	002-90742



Optional electrical accessories

DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2 200-1050 mA 2 x 42W	36-88-59	005-6121030



[048-2840414A 048-2896317 002-90742] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

27.09.2024

2 / 2