

SASSO 40 round downlight

trimless

048-2800517M 048-2896117 002-90744



Project / Type

Notes

Count / Date



↑ IP20
↓ IP44

220-240V

↻

X-PERT

UGR
≤19

CRI
≥90

X-PERT

General

Ceiling , Recessed

rotation 360°

white , RAL9016 ¹

Mounting set traffic white

front IP44 , back IP20

478 lm

LED

3000 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 100 , R_f: 89 , R_{f(1-15)}: 89

MR 0.56

MDER 0.51

Optical

medium

beam angle 29°

UGR < 19

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

9.9 W

inset 7.5 W

36 Vf

200 mA

PC2 220-240V

48 lm/W

inset 64 lm/W

Physical

trimless

diameter 56 mm

height 50 mm

0.61 kg


Cutout

diameter 56 mm


recessed depth 60 mm

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing

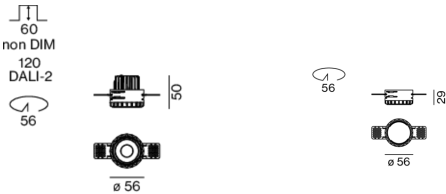

Installation instructions



Lighting calculator

