

# SASSO 40 round downlight

trim

048-2800419S 048-2896317 002-90744



Project / Type

Notes

Count / Date



↑ IP20

↓ IP44

220-240V

↻

X-PERT

UGR

≤13

CRI

≥90

X-PERT

### General

Ceiling , Recessed

rotation 360°

gold , RAL260-M <sup>1</sup>

Mounting set traffic white

front IP44 , back IP20

419 lm

### LED

2700 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 89 , R<sub>f(1-15)</sub>: 86

MR 0.49

MDER 0.44

### Optical

spot

beam angle 17°

UGR < 13

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

non DIM

9.9 W

inset 7.5 W

36 Vf

200 mA

PC2 220-240V

42 lm/W

inset 56 lm/W

### Physical

trim

diameter 60 mm

height 50 mm

0.6 kg

### Cutout

diameter 56 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 60 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

### Light distribution



### Product drawing

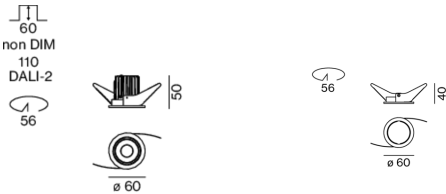

### Installation instructions



### Lighting calculator

