

# SASSO 40 round downlight

trim

048-2800419M 048-2896317 002-90745



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

rotation 360°

gold , RAL260-M <sup>1</sup>

Mounting set traffic white

front IP44 , back IP20

418 lm

## LED

2700 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 89 , R<sub>(1-15)</sub>: 86

MR 0.49

MDER 0.44

## Optical

medium

beam angle 29°

UGR < 16 , ≥65° <1500 cd/m<sup>2</sup>

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2

9.9 W

inset 7.5 W

36 Vf

200 mA

PC2 220-240V

42 lm/W

inset 56 lm/W

## Physical

trim

diameter 60 mm

height 50 mm

0.21 kg

## Cutout

diameter 56 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 110 mm


<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

Round recessed spotlight in die-cast aluminium; surface gold; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 29° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m<sup>2</sup>; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

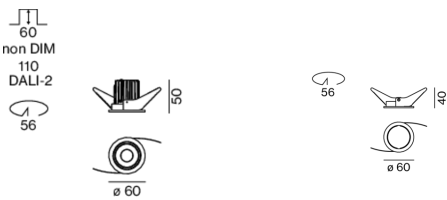

## Installation instructions



## Lighting calculator

