

SASSO 40 round downlight


trim

048-2800617M 048-2896318 002-90744




Round recessed spotlight in die-cast aluminium; surface white; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 29° beam; UGR ≤ 19 ; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

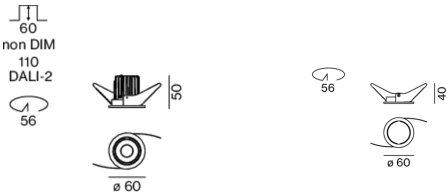

Project / Type
Notes
Count / Date



General

Ceiling , Recessed
rotation 360°
white , RAL9016 ¹
Mounting set jet black
front IP44 , back IP20
505 lm

LED

4000 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 97 , R _f : 89 , R _{f(1-15)} : 91
MR 0.85
MDER 0.77

Optical

medium
beam angle 29°
UGR < 19
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

non DIM
9.9 W
inset 7.5 W
36 Vf
200 mA
PC2 220-240V
51 lm/W
inset 68 lm/W

Physical

trim
diameter 60 mm
height 50 mm
0.59 kg

Cutout

diameter 56 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 60 mm

¹ RAL code ² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

