

SASSO 40 round downlight

trimless


048-2800617F 048-2896117 002-90744



Project / Type

Notes

Count / Date

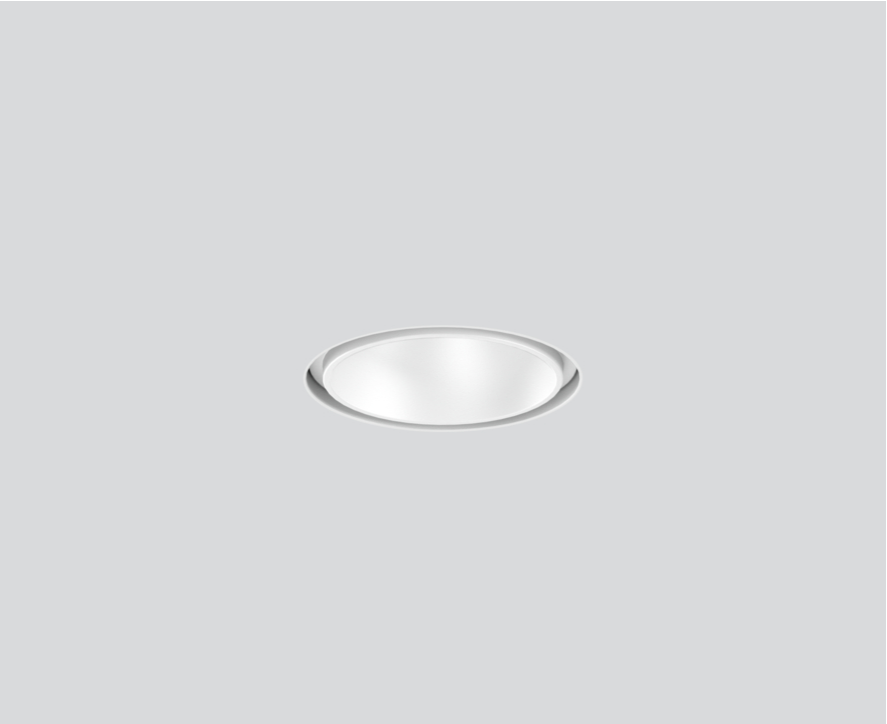

↑ IP20

↓ IP44

220-240V

↺

↻

X-PERT

UGR

≤22

CRI

≥90

X-PERT

General

Ceiling , Recessed

rotation 360°

white , RAL9016 ¹

Mounting set traffic white

front IP44 , back IP20

474 lm

LED

4000 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 97 , R_f: 89 , R_{f(1-15)}: 91

MR 0.85

MDER 0.77

Optical

flood

beam angle 44°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

9.9 W

inset 7.5 W

36 Vf

200 mA

PC2 220-240V

48 lm/W

inset 64 lm/W

Physical

trimless

diameter 56 mm

height 50 mm

0.61 kg


Cutout

diameter 56 mm


recessed depth 60 mm

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing

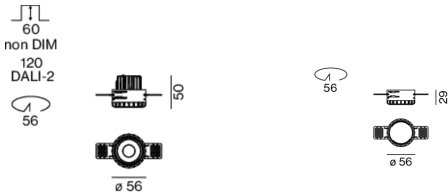

Installation instructions

Lighting calculator

