

SASSO 40 round downlight

trimless


048-2800417F 048-2896117 002-90744



Project / Type

Notes

Count / Date

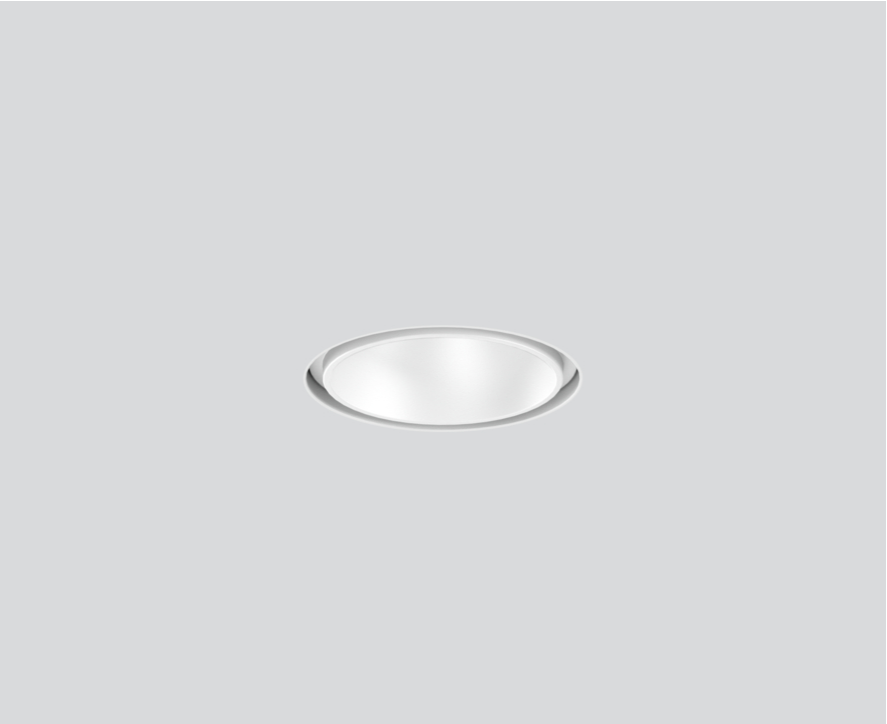

↑ IP20

↓ IP44

220-240V

↻

X-PERT

UGR

≤22

CRI

≥90

X-PERT

General

Ceiling , Recessed

rotation 360°

white , RAL9016 ¹

Mounting set traffic white

front IP44 , back IP20

429 lm

LED

2700 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 100 , R_f: 89 , R_{f(1-15)}: 86

MR 0.49

MDER 0.44

Optical

flood

beam angle 44°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

9.9 W

inset 7.5 W

36 Vf

200 mA

PC2 220-240V

43 lm/W

inset 58 lm/W

Physical

trimless

diameter 56 mm

height 50 mm

0.61 kg


Cutout

diameter 56 mm


recessed depth 60 mm

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing

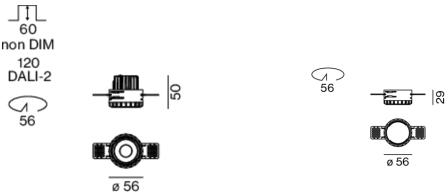

Installation instructions



Lighting calculator

