

SASSO 40 round downlight


trimless

048-2800411S 048-2896117 002-90744




Round recessed spotlight in die-cast aluminium; surface black; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 17° beam; UGR ≤ 13 ; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

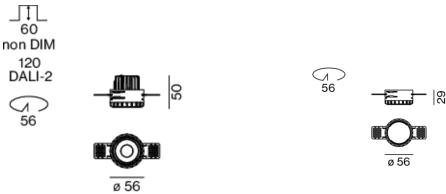

Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
rotation 360°	
black , RAL9005 ¹	
Mounting set traffic white	
front IP44 , back IP20	
421 lm	

LED

2700 K	
CRI ≥ 90	
L85 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 100 , R _f : 89 , R _{f(1-15)} : 86	
MR 0.49	
MDER 0.44	

Optical

spot	
beam angle 17°	
UGR < 13	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

non DIM	
9.9 W	
inset 7.5 W	
36 Vf	
200 mA	
PC2 220-240V	
43 lm/W	
inset 57 lm/W	

Physical

trimless	
diameter 56 mm	
height 50 mm	
0.61 kg	

Cutout

diameter 56 mm	
recessed depth 60 mm	

¹ RAL code ² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

