

SASSO 100 square wallwasher/floor

trim 2 lamps

048-2750614W 048-2799318 002-90774



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

matt silver _____

Mounting set jet black _____

IP20 _____

5540 lm _____

LED

4000 K _____

CRI \geq 90 _____

L80 / 50000 h _____

initial MacAdam \leq 2 SDCM _____

R_g: 97 , R_f: 90 , R₍₁₋₁₅₎: 89 _____

MR 0.81 _____

MDER 0.74 _____

Optical

wallwasher floor _____

PstLM \leq 1.0 ¹ _____

SVM \leq 0.4 ¹ _____

Electrical

non DIM _____

system 55 W _____

inset 23.4 W _____

36 Vf _____

700 mA _____

total insets 47 W _____

PC2 220-240V _____

system 101 lm/W² _____

inset 119 lm/W³ _____

Physical

trim _____

length 218 mm _____

width 118 mm _____

height 96 mm _____

0.75 kg _____

Cutout

length 210 mm _____

width 112 mm _____

min. ceiling thickness 2 mm _____

max. ceiling thickness 25 mm _____

recessed depth 100 mm _____


¹ Value of containing product at full load (undimmed)

² incl. optical losses and the efficiency of the operating device (converter)


³ incl. optical losses

Recessed square spotlight in die-cast aluminium; 2 lamps; surface matt silver; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam \leq 2 SDCM; CRI \geq 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

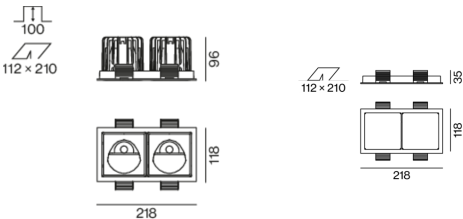

Installation instructions



Lighting calculator

