SASSO 100 round wallwasher/floor

trim

048-2740617W 048-2796318 002-90774

Project / Type

Notes

Count / Date

Round recessed spotlight in die-cast aluminium; 1 lamp; surface white; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

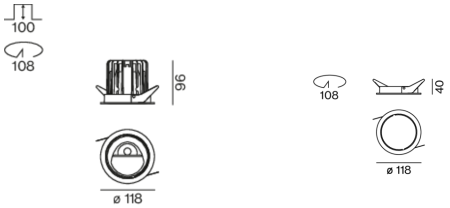

General

Ceiling , Recessed
rotation 360°
white , RAL9016 [1]
Mounting set jet black
IP20
2770 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 97 , R_f: 90 , $R_{f\{1\text{-}15\}}$: 89
MR 0.81
MDER 0.74

Optical

wallwasher floor
PstLM ≤ 1.0 [2]
SVM ≤ 0.4 [2]

Electrical

non DIM
system 27.5 W
inset 23.4 W
36 Vf
700 mA
PC2 220-240V
system 101 lm/W[3]
inset 119 lm/W[4]

Physical

trim
diameter 118 mm
height 96 mm
0.65 kg

Cutout

diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

[1] RAL code [2] Value of containing product at full load (undimmed)
[3] incl. optical losses and the efficiency of the operating device (converter)
[4] incl. optical losses

Installation instructions

Lighting calculator

['048-2740617W 048-2796318 002-90774'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com